

PDF technical sheet


7020UADG/GNP42U3G




High precision angular contact ball bearings

High precision angular contact ball bearing, moulded polyamide cage centred on balls

Product definition	
d	3.9370 "
D	5.9055 "
B	0.9449 "
d1	4.6024 "
d2	4.4488 "
D1	5.2441 "
D2	5.5512 "
a	1.6260 "
Contact angle, α	25 °
rs min	0.0591 "
r1s min	0.0394 "
f0	16.2
Precision class	P42
Mass	4.48 oz
Brand	NTN

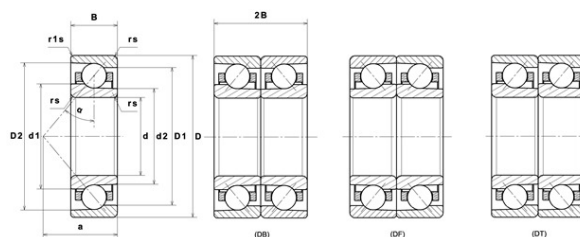

Product performance	
Dynamic load, C	73.50 kN
Static load, C0	76.50 kN
Nlim (oil)	13,100 RPM
Nlim (grease)	8,100 RPM
Preload level	GN
Peload value	740 kN
axial rigidity	300 N/ μ m
radial rigidity	645 N/ μ m
Min operating temperature, Tmin	-4 °C
Max operating temperature, Tmax	248 °C
Characteristic cage frequency, FTF	0.45 Hz
Characteristic rolling element frequency, BSF	8.19 Hz
Characteristic outer ring frequency, BPF0	10.24 Hz
Characteristic inner ring frequency, BPFI	12.76 Hz

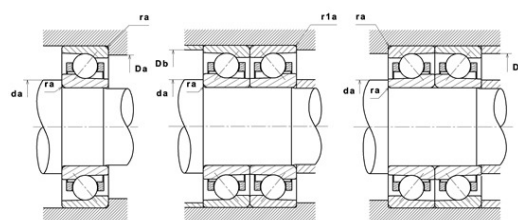

Abutment dimensions

da min	4.2717 "
Da max	5.5709 "
Db max	5.6890 "
r1a max	0.0394 "
ra max	0.0591 "
D6	4.6024 "

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

Series			e	Single or DT bearing arrangement				DB or DF arrangement					
				Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e			
				X	Y	X	Y	X	Y	X	Y		
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	1.65	0.72	2.39		
		0.357	0.4				1.4		1.57		2.28		
		0.714	0.43				1.3		1.46		2.11		
		1.07	0.46				1.23		1.38		2		
		1.43	0.47				1.19		1.34		1.93		
		2.14	0.5				1.12		1.26		1.82		
		3.57	0.55				1.02		1.14		1.66		
		5.35	0.56						1.12		1.63		
		7.14	0.56				1		1.12		1.63		
	25°		0.68	1	0	0.41	0.87	1	0.92	0.67	1.41		
	30°		0.8										
							0.39		0.76		0.78	0.63	1.24

Equivalent static radial load

$$P_o = X_o.F_r + Y_o.F_a$$

Series			Single or DT bearing arrangement		DB or DF arrangement	
			X ₀	Y ₀	X ₀	Y ₀
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°		0.5	0.46	1	0.92
	25°			0.38		0.76
	30°			0.33		0.66

For single or DT bearing arrangement :

If $P_o < F_r$, then use $P_o = F_r$