


## PDF technical sheet 7234BGM




### Single row or matched pairs of angular contact ball bearings

Angular contact ball bearing, brass cage ball guided

| Product definition      |           |
|-------------------------|-----------|
| d                       | 6.6929 "  |
| D                       | 12.2047 " |
| B                       | 2.0472 "  |
| d1                      | 8.8976 "  |
| d2                      | 7.3780 "  |
| D1                      | 10.0394 " |
| D2                      | 11.5827 " |
| a                       | 5.0000 "  |
| Contact angle, $\alpha$ | 40 °      |
| rs min                  | 0.1575 "  |
| r1s min                 | 0.0591 "  |
| Radial clearance class  | CN        |
| Mass                    | 123.46 oz |
| Brand                   | SNR       |

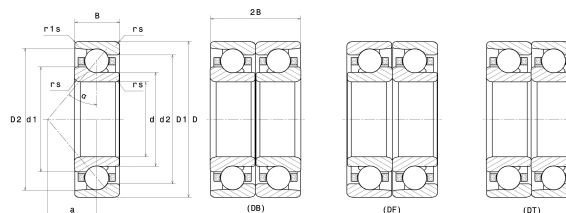

| Product performance                           |           |
|-----------------------------------------------|-----------|
| Dynamic load, C                               | 266 kN    |
| Static load, C0                               | 326 kN    |
| Fatigue limit load, Cu                        | 9.60 kN   |
| Nref                                          | 2,700 RPM |
| Nlim                                          | 2,600 RPM |
| Min operating temperature, Tmin               | -40 °C    |
| Max operating temperature, Tmax               | 248 °C    |
| Characteristic cage frequency, FTF            | 0.43 Hz   |
| Characteristic rolling element frequency, BSF | 5.71 Hz   |
| Characteristic outer ring frequency, BPF0     | 6.95 Hz   |
| Characteristic inner ring frequency, BPF1     | 9.05 Hz   |

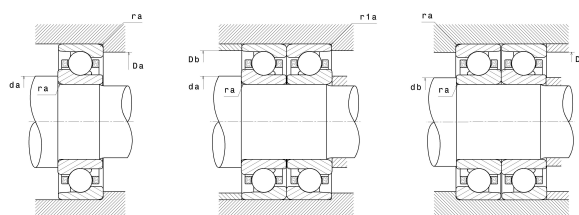

| Abutment dimensions |           |
|---------------------|-----------|
| da min              | 7.4016 "  |
| db min              | 7.4016 "  |
| Da max              | 11.4961 " |
| Db max              | 11.8701 " |
| r1a max             | 0.0591 "  |
| ra max              | 0.1181 "  |

## Calculation factors

### Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

|     | e    | Single or DT bearing arrangement |   |             |      | DB or DF arrangement |      |             |      |
|-----|------|----------------------------------|---|-------------|------|----------------------|------|-------------|------|
|     |      | Fa / Fr ≤ e                      |   | Fa / Fr > e |      | Fa / Fr ≤ e          |      | Fa / Fr > e |      |
|     |      | X                                | Y | X           | Y    | X                    | Y    | X           | Y    |
| 30° | 0.8  | 1                                | 0 | 0.9         | 0.76 | 1                    | 0.78 | 0.63        | 1.24 |
| 40° | 1.14 |                                  |   | 0.35        | 0.57 |                      | 0.55 | 0.57        | 0.93 |

### Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

| a   | Single or DT bearing arrangement |                | DB or DF arrangement |                |
|-----|----------------------------------|----------------|----------------------|----------------|
|     | X <sub>0</sub>                   | Y <sub>0</sub> | X <sub>0</sub>       | Y <sub>0</sub> |
| 30° | 0.5                              | 0.33           | 1                    | 0.66           |
| 40° |                                  | 0.26           |                      | 0.52           |

For single or DT bearing arrangement :

If  $P_0 < F_r$ , then use  $P_0 = F_r$