


PDF technical sheet 7032HVUJ74



High precision angular contact ball bearings

High precision angular contact ball bearing, laminated resin cage centred on outer ring

Product definition	
d	6.2992 "
D	9.4488 "
B	1.4961 "
d1	7.3110 "
D1	8.4379 "
D2	8.9231 "
a	2.5984 "
Contact angle, α	25 °
rs min	0.0827 "
r1s min	0.0394 "
f0	16.211
Precision class	P4
Mass	18.10 oz
Brand	SNR

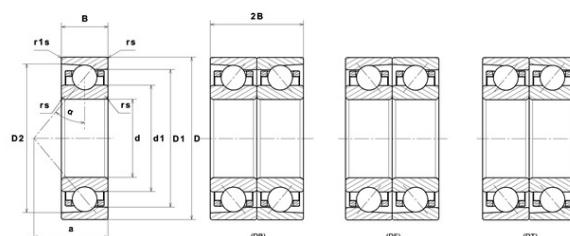

Product performance	
Dynamic load, C	166 kN
Static load, C0	192 kN
Fatigue limit load, Cu	7.60 kN
Nlim (oil)	8,000 RPM
Nlim (grease)	5,300 RPM
Axial displacement K Factor	0.36
Preload level	7
Peloid value	2,150 kN
axial rigidity	515 N/ μ m
radial rigidity	1,087 N/ μ m
Min operating temperature, Tmin	-22 °C
Max operating temperature, Tmax	248 °C
Characteristic cage frequency, FTF	0.45 Hz
Characteristic rolling element frequency, BSF	8.30 Hz
Characteristic outer ring frequency, BPF0	10.26 Hz
Characteristic inner ring frequency, BPF1	12.74 Hz



Abutment dimensions

da min	6.7717 "
db min	6.7717 "
Da max	8.9764 "
Db max	8.9764 "
r1a max	0.0394 "
ra max	0.0787 "
D6	7.5591 "

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

Series			e	Single or DT bearing arrangement				DB or DF arrangement			
				Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e	
				X	Y	X	Y	X	Y	X	Y
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	1.65	0.72	2.39
		0.357	0.4				1.4		1.57		2.28
		0.714	0.43				1.3		1.46		2.11
		1.07	0.46				1.23		1.38		2
		1.43	0.47				1.19		1.34		1.93
		2.14	0.5				1.12		1.26		1.82
		3.57	0.55				1.02		1.14		1.66
		5.35	0.56						1.12		1.63
		7.14	0.56				1		1.12		1.63
	25°		0.68			0.41	0.87		0.92	0.67	1.41
	30°		0.8			0.39	0.76		0.78	0.63	1.24

Equivalent static radial load

$$Po = Xo \cdot Fr + Yo \cdot Fa$$

Series			Single or DT bearing arrangement		DB or DF arrangement	
			X ₀	Y ₀	X ₀	Y ₀
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°		0.5	0.46	1	0.92
	25°			0.38		0.76
	30°			0.33		0.66

For single or DT bearing arrangement :

If $Po < Fr$, then use $Po = Fr$