



PDF technical sheet 5208ZZG15C3D159QTX




Double row angular contact ball bearings

Product definition	
d	1.5748 "
D	3.1496 "
B	1.1890 "
d1	2.0866 "
D1	2.8071 "
rs min	0.0433 "
Radial clearance class	C3
Brand	SNR

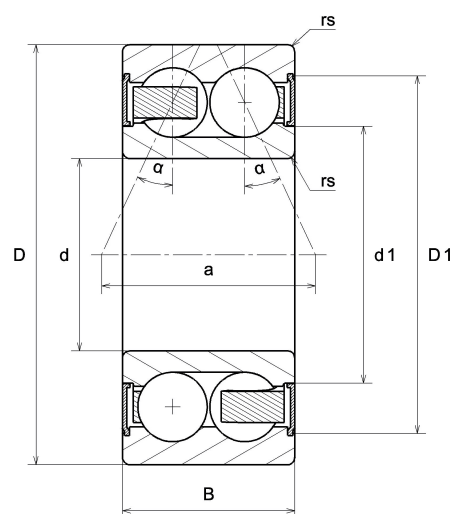

Product performance	
Dynamic load, C	46.10 kN
Static load, C0	36.30 kN
Fatigue limit load, Cu	2.22 kN
f0	14.2
Nref	7,100 RPM
Nlim	5,800 RPM
Min operating temperature, Tmin	-4 °C
Max operating temperature, Tmax	248 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	4.63 Hz
Characteristic outer ring frequency, BPF0	3.65 Hz
Characteristic inner ring frequency, BPFI	5.35 Hz

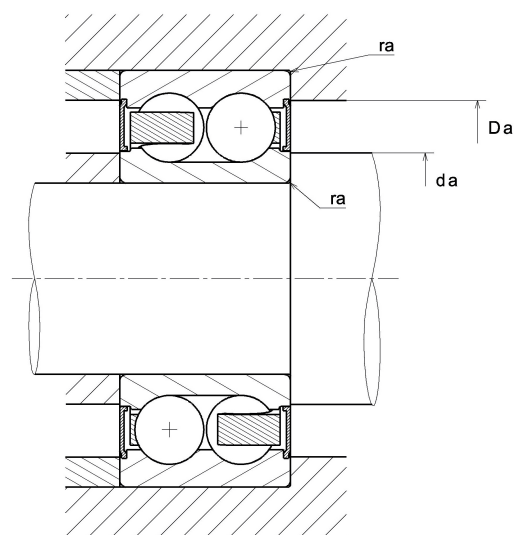

Abutment dimensions	
da min	1.8307 "
da max	2.0866 "
Da max	2.8937 "
ra max	0.0394 "