


6312LLBNR/2AS Référence: 6312LLBNR/2AS

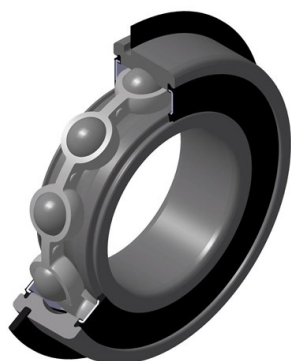

d	2.3622 "
D	Product performance
B	Dynamic load, C
a min	Static load, C0
a max	Patigue limit load, Cu
Ca min	0.2636 "
Ca max	0.2789 "
rs min	Min (grease)
rs min	Min operating temperature, Tmin
rNs min	Max operating temperature, Tmax
D3 max	Characteristic cage frequency, FTF
b min	Characteristic rolling element frequency, BSF
b max	Characteristic outer ring frequency, BPF0
r0 max	Characteristic inner ring frequency, BPFI
D4 max	5.5000 "
f	0.1110 "
	Snap ring reference
	Radial clearance class
	Mass
	Brand

Abutment dimensions

da min	2.7953 "
da max	3.1693 "
Da max	4.6850 "
ra max	0.0787 "
rNa max	0.0197 "
Db min	5.5709 "