



PDF technical sheet 6304.NRZ




Single row deep groove ball bearings

Product definition	
d	0.7874 "
D	2.0472 "
B	0.5906 "
d1	1.1811 "
D1	1.7913 "
a min	0.0909 "
a max	0.0969 "
Ca min	0.1311 "
Ca max	0.1409 "
rs min	0.0433 "
rNs min	0.0197 "
D3 max	1.9579 "
b min	0.0531 "
b max	0.0650 "
r0 max	0.0157 "
D4 max	2.2795 "
f	0.0421 "
Snap ring reference	R52
Radial clearance class	CN
Mass	0.52 oz
Brand	SNR

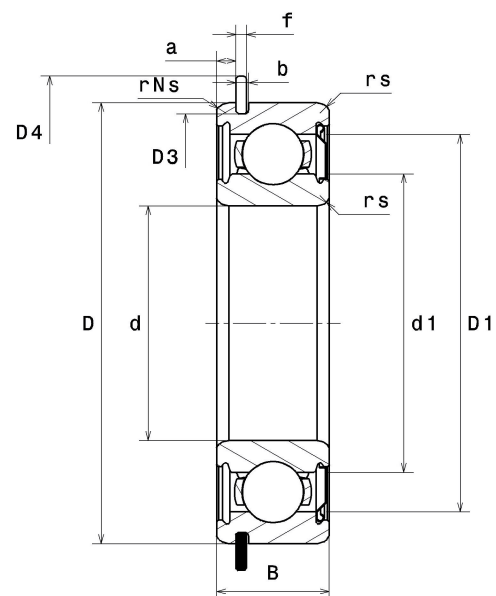

Product performance	
Dynamic load, C	15.80 kN
Static load, C0	7.90 kN
Fatigue limit load, Cu	0.36 kN
f0	12.4
Nref	14,000 RPM
Nlim	23,000 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	248 °C
Characteristic cage frequency, FTF	0.37 Hz
Characteristic rolling element frequency, BSF	3.52 Hz
Characteristic outer ring frequency, BPF0	2.57 Hz
Characteristic inner ring frequency, BPF1	4.43 Hz

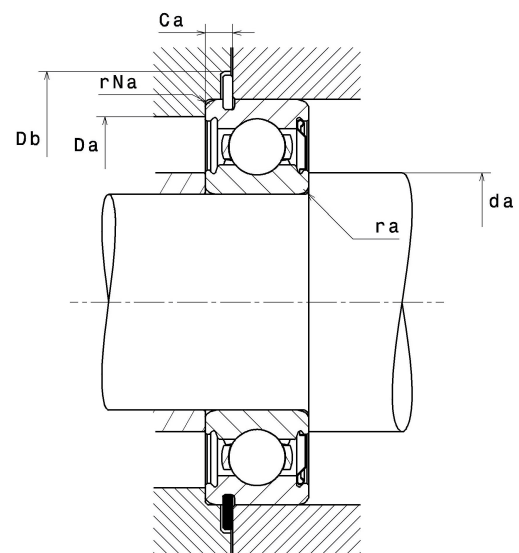

Abutment dimensions

da min	1.0433 "
da max	1.1811 "
Da max	1.7913 "
ra max	0.0394 "
rNa max	0.0197 "
Db min	2.3031 "

349/702/3/en/DGBB.jpg