


| Housing    | Bearings | Fixing rings (2x) | Regulation disc |
|------------|----------|-------------------|-----------------|
| SNC226-526 | 22226K   | FR 230x13         | RDC526          |
|            | 23226K   | FR 230x5          |                 |

## PDF technical sheet SNC526



### Split plummer block housings SNC (D)

split plummer block for bearings on adapter sleeve, made of grey cast, for grease lubrication

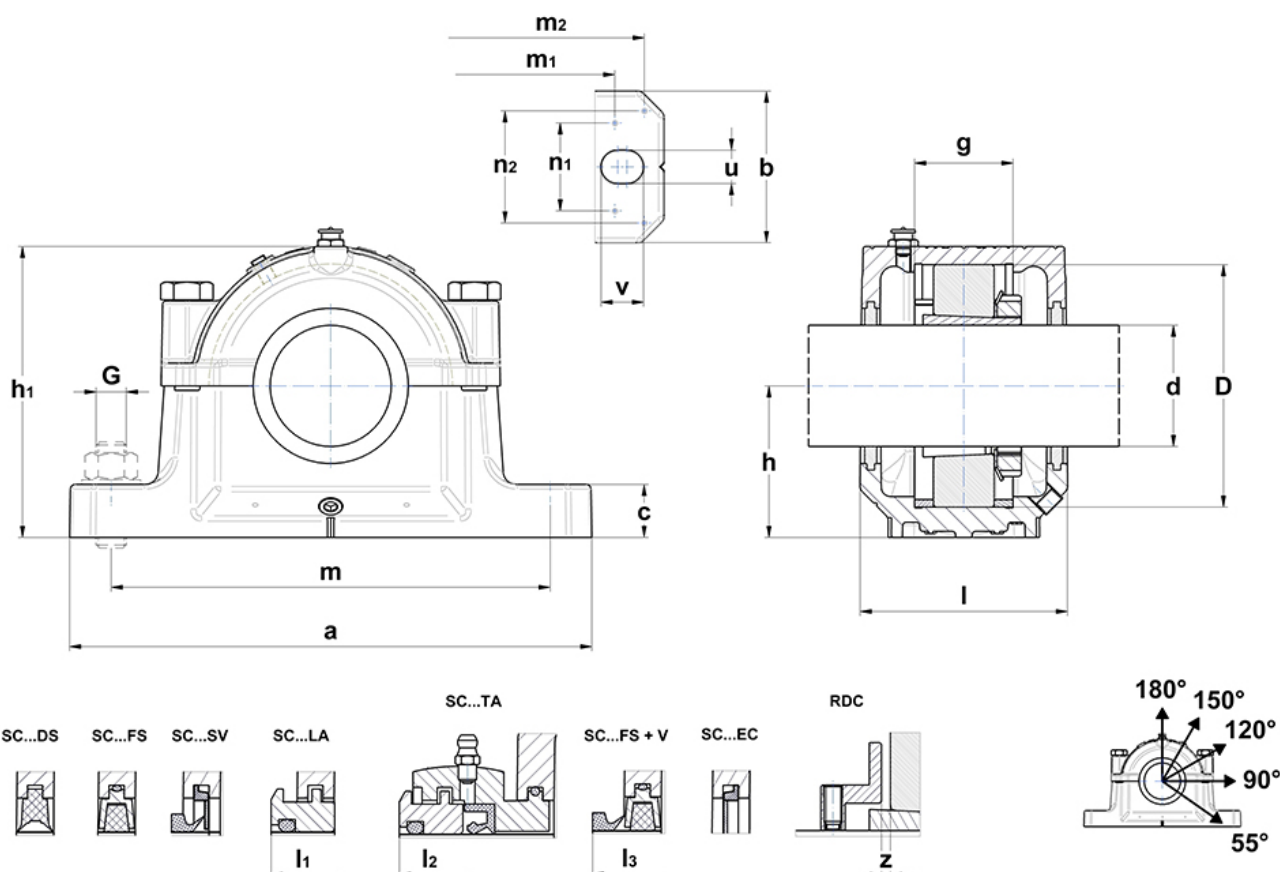

| Product definition      |           |
|-------------------------|-----------|
| d                       | 4.5276 "  |
| a                       | 17.5197 " |
| b                       | 5.1181 "  |
| c                       | 1.9685 "  |
| g                       | 3.5433 "  |
| h                       | 5.9055 "  |
| h1                      | 11.4173 " |
| l                       | 7.4803 "  |
| l1                      | 8.1496 "  |
| l2                      | 10.5906 " |
| l3                      | 221       |
| m                       | 14.9606 " |
| m1                      | 14.5669 " |
| m3                      | 11.8898 " |
| n1                      | 3.1496 "  |
| m2                      | 16.2992 " |
| n2                      | 3.6220 "  |
| diameter dowel pins     | 0.3150 "  |
| u                       | 1.1024 "  |
| v                       | 1.3780 "  |
| D                       | 9.0551 "  |
| z                       | 0.1575 "  |
| housing weight          | 129.10 oz |
| Material of Housing     | grey cast |
| initial grease quantity | 1,600 ccm |
| Brand                   | SNR       |

| Sealings and cover |            |
|--------------------|------------|
| sealing DS         | SC 526 DS  |
| sealing LA         | SC 526 LA  |
| sealing SV         | SC 526 SV  |
| sealing TA         | SC 526 TA  |
| sealing FS         | SC 526 FS  |
| end cover EC       | SC226526EC |
| Vring option       | V120A      |

| Screws             |         |
|--------------------|---------|
| fixing bolts G     | M24     |
| recommended torque | 500 Nm  |
| Connection bolts   | M24x130 |
| recommended torque | 500 Nm  |
| maximum loads 120° | 360 kN  |
| maximum loads 150° | 210 kN  |
| maximum loads 180° | 180 kN  |

| Breaking loads |          |
|----------------|----------|
| P 0°           | 1,060 kN |
| P 55°          | 900 kN   |
| P 90°          | 540 kN   |
| P 120°         | 410 kN   |
| P 150°         | 360 kN   |
| P 180°         | 450 kN   |