


| bearing 1 | Nut   | Lock washer | Feltstrips (optional) |
|-----------|-------|-------------|-----------------------|
| 22217     | KM 17 | MB 17       | 9x7,5x350             |

## PDF technical sheet SNOE217CBF



### Split plummer block housings SNOE

split plummer block housing for spherical roller bearings with cylindrical bore, made of grey cast, for oil lubrication

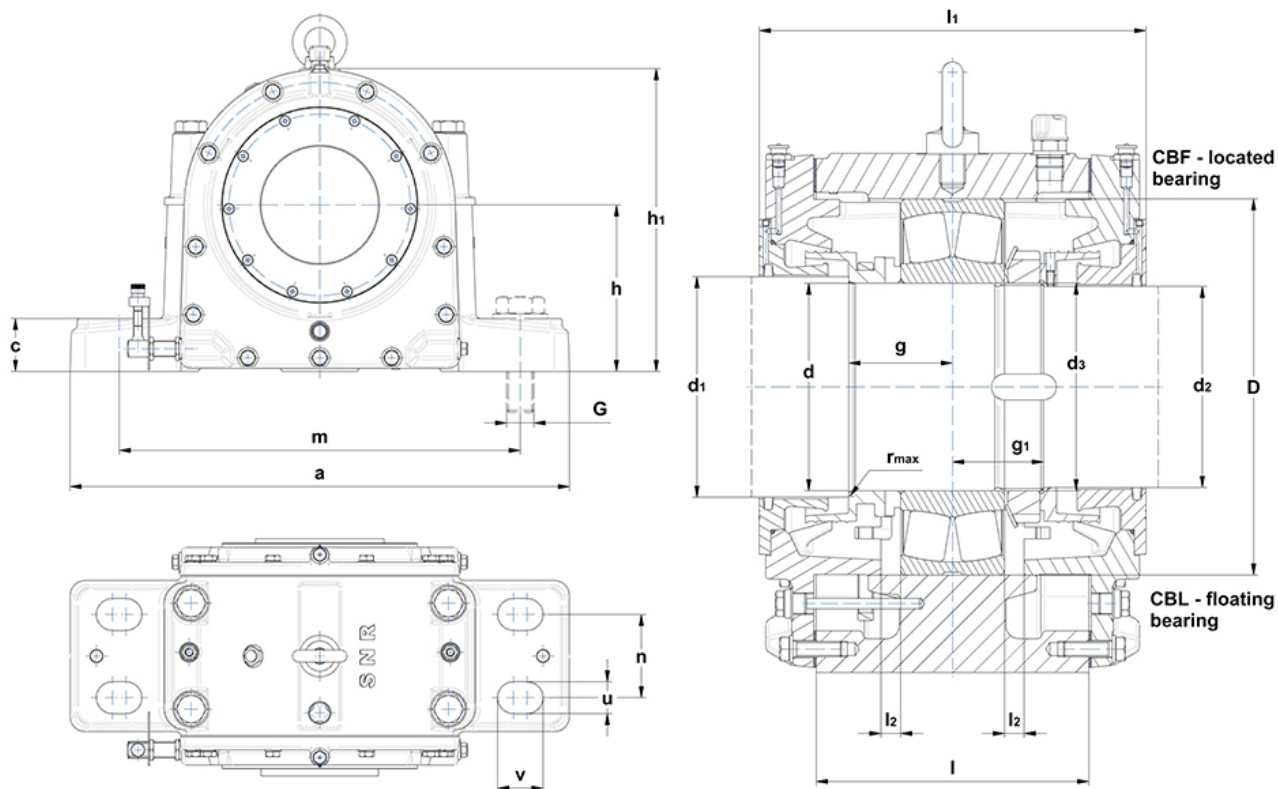

| Product definition  |                       |
|---------------------|-----------------------|
| d                   | 3.3465 "              |
| d1                  | 3.5433 "              |
| d2                  | 3.2283 "              |
| d3                  | M85x2                 |
| a                   | 16.1417 "             |
| b                   | 5.9055 "              |
| c                   | 1.8898 "              |
| g                   | 2.4409 "              |
| g1                  | 1.4567 "              |
| h                   | 5.3150 "              |
| h1                  | 9.4488 "              |
| l                   | 6.2992 "              |
| l1                  | 9.0551 "              |
| l2                  |                       |
| m                   | 13.3858 "             |
| n                   | 3.1496 "              |
| u                   | 0.9843 "              |
| v                   | 1.3780 "              |
| r max               | 0.0394 "              |
| D                   | 5.9055 "              |
| oil level           | 47.4409 "             |
| oil quantity        | 22.94 in <sup>3</sup> |
| housing weight      | 158.73 oz             |
| Material of Housing | grey cast             |
| Brand               | SNR                   |

| Screws             |        |
|--------------------|--------|
| fixing bolts G     | M20    |
| recommended torque | 260 Nm |
| Connection bolts   | M16    |
| recommended torque | 130 Nm |
| Eye bolt(s)        | M12    |