


| bearing 1 | Nut   | Lock washer | Feltstrips (optional) |
|-----------|-------|-------------|-----------------------|
| 22219     | KM 19 | MB 19       | 9x7,5x389             |

## PDF technical sheet SNOE.219.CBL



### Split plummer block housings SNOE

split plummer block housing for spherical roller bearings with cylindrical bore, made of grey cast, for oil lubrication

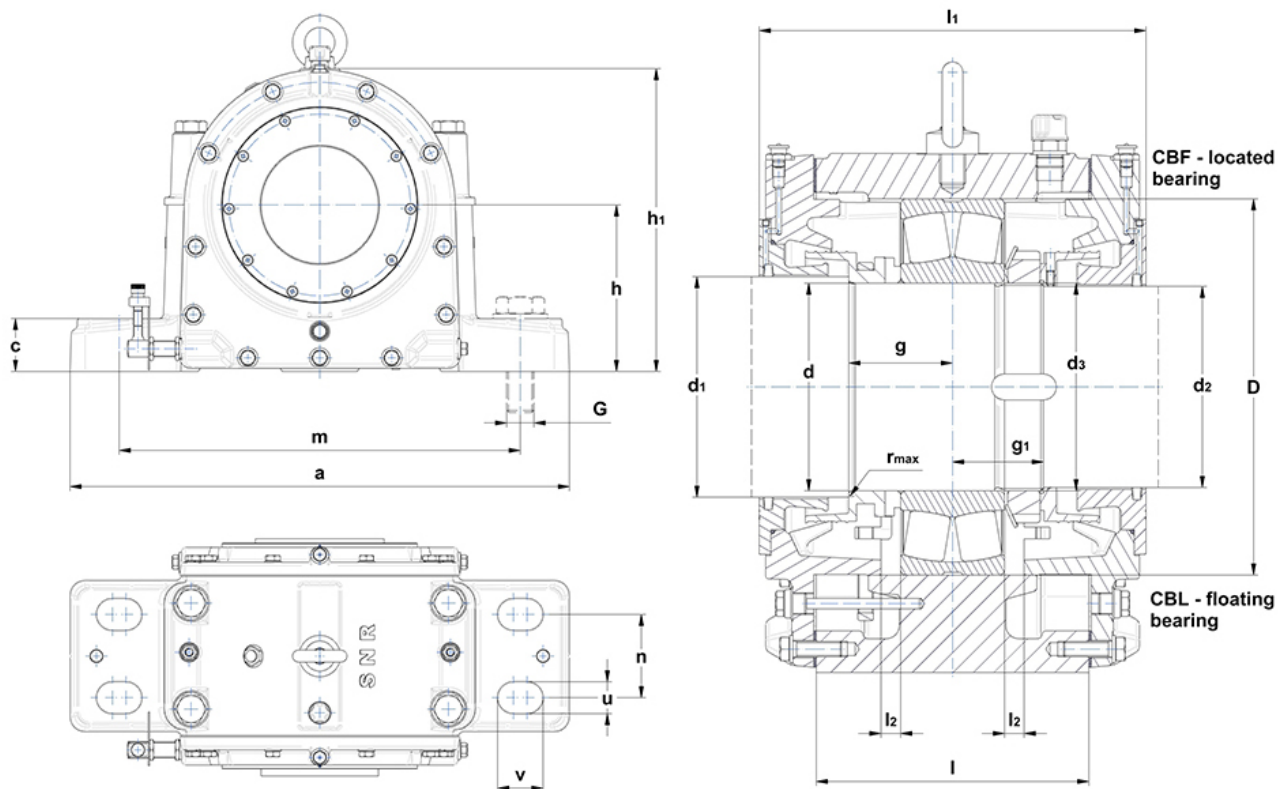

| Product definition  |                       |
|---------------------|-----------------------|
| d                   | 3.7402 "              |
| d1                  | 3.9370 "              |
| d2                  | 3.6220 "              |
| d3                  | M95x2                 |
| a                   | 19.2913 "             |
| b                   | 6.2992 "              |
| c                   | 1.9685 "              |
| g                   | 2.6378 "              |
| g1                  | 1.6535 "              |
| h                   | 5.9055 "              |
| h1                  | 10.6299 "             |
| l                   | 6.6929 "              |
| l1                  | 9.8425 "              |
| l2                  |                       |
| m                   | 15.7480 "             |
| n                   | 3.1496 "              |
| u                   | 1.1811 "              |
| v                   | 1.7717 "              |
| r max               | 0.0394 "              |
| D                   | 6.6929 "              |
| oil level           | 52.2441 "             |
| oil quantity        | 26.22 in <sup>3</sup> |
| housing weight      | 194.01 oz             |
| Material of Housing | grey cast             |
| Brand               | SNR                   |

| Screws             |        |
|--------------------|--------|
| fixing bolts G     | M24    |
| recommended torque | 440 Nm |
| Connection bolts   | M16    |
| recommended torque | 130 Nm |
| Eye bolt(s)        | M12    |