


| bearing 1 | Nut   | Lock washer | Feltstrips (optional) |
|-----------|-------|-------------|-----------------------|
| 22230     | KM 30 | MB 30       | 9x7,5x607             |

## PDF technical sheet SNOE230DCAF



### Split plummer block housings SNOE

split plummer block housing for spherical roller bearings with cylindrical bore, made of grey cast, for oil lubrication

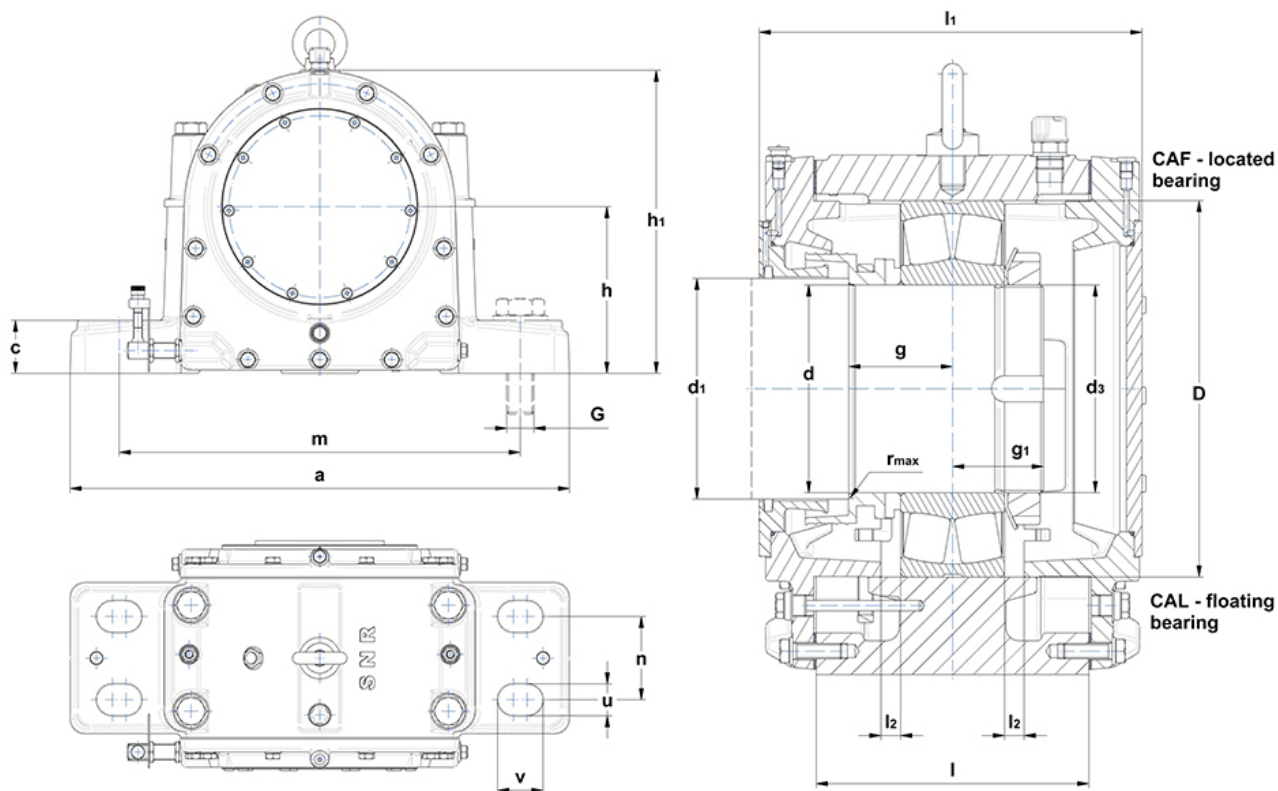

| Product definition  |                       |
|---------------------|-----------------------|
| d                   | 5.9055 "              |
| d1                  | 6.1417 "              |
| d3                  | M150x2                |
| a                   | 25.9843 "             |
| b                   | 7.4803 "              |
| c                   | 2.7559 "              |
| g                   | 3.2283 "              |
| g1                  | 2.5197 "              |
| h                   | 8.6614 "              |
| h1                  | 15.7480 "             |
| l                   | 7.8740 "              |
| l1                  | 11.1417 "             |
| l2                  |                       |
| m                   | 20.8661 "             |
| n                   | 3.9370 "              |
| u                   | 1.6535 "              |
| v                   | 2.3622 "              |
| r max               | 0.0630 "              |
| D                   | 10.6299 "             |
| oil level           | 61.4567 "             |
| oil quantity        | 68.83 in <sup>3</sup> |
| housing weight      | 423.29 oz             |
| Material of Housing | ductile cast          |
| Brand               | SNR                   |

| Screws             |          |
|--------------------|----------|
| fixing bolts G     | M36      |
| recommended torque | 1,520 Nm |
| Connection bolts   | M24      |
| recommended torque | 440 Nm   |
| Eye bolt(s)        | M20      |