


bearing 1	Nut	Lock washer	Feltstrips (optional)
22236	KM 36	MB 36	9x7,5x740

PDF technical sheet SNOE2362DCBF



Split plummer block housings SNOE

split plummer block housing for spherical roller bearings with cylindrical bore, made of ductile cast, for oil lubrication

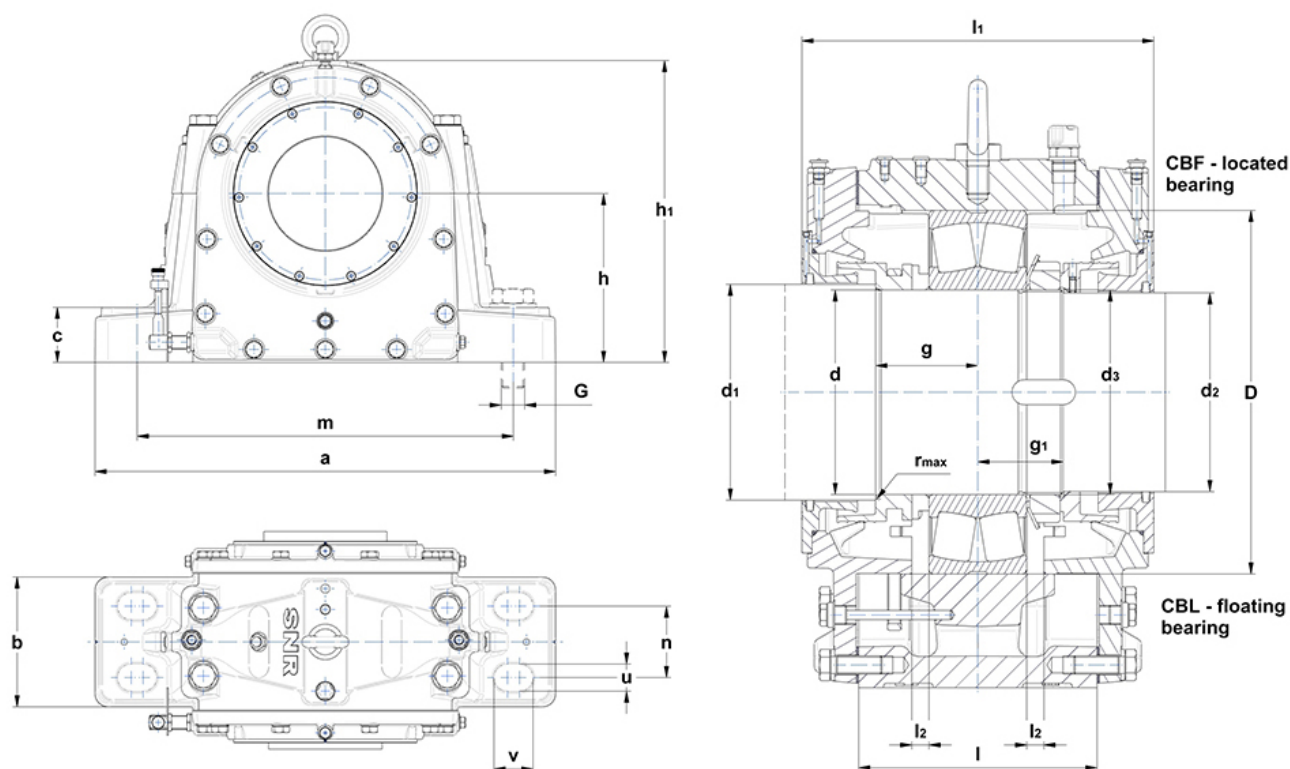

Product definition	
d	7.0866 "
d1	7.4803 "
d2	6.8898 "
d3	M180x3
a	27.9528 "
b	7.8740 "
c	3.3465 "
g	3.5433 "
g1	2.9528 "
h	10.2362 "
h1	18.3071 "
l	8.2677 "
l1	12.2047 "
l2	
m	22.8346 "
n	4.3307 "
u	1.6535 "
v	2.3622 "
r max	0.0984 "
D	12.5984 "
oil level	70.6693 "
oil quantity	85.21 in ³
housing weight	634.93 oz
Material of Housing	ductile cast
Brand	SNR

Screws	
fixing bolts G	M36
recommended torque	1,520 Nm
Connection bolts	M24
recommended torque	440 Nm
Eye bolt(s)	M20