


| bearing 1 | Nut   | Lock washer | Feltstrips (optional) |
|-----------|-------|-------------|-----------------------|
| 22240     | KM 40 | MB 40       | 11x14x818             |

## PDF technical sheet SNOE2402DCBL



### Split plummer block housings SNOE

split plummer block housing for spherical roller bearings with cylindrical bore, made of ductile cast, for oil lubrication

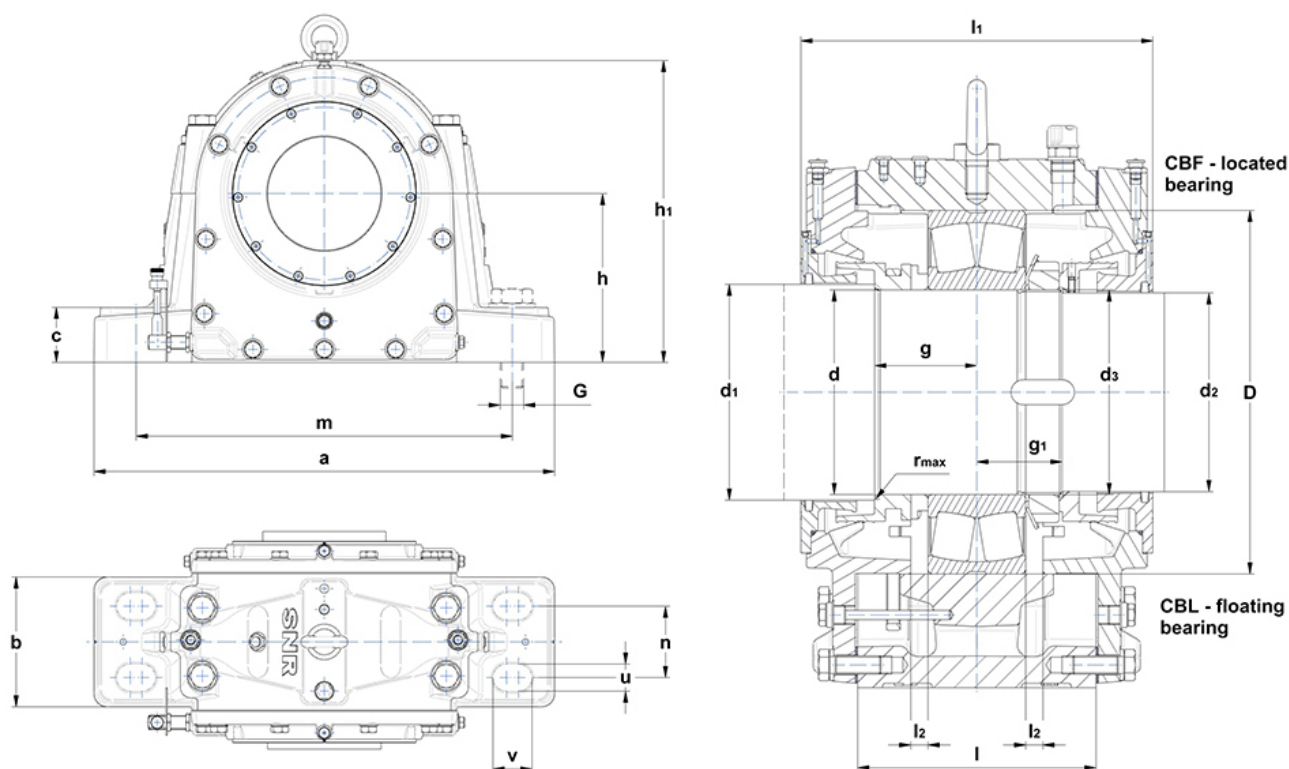

| Product definition  |                        |
|---------------------|------------------------|
| d                   | 7.8740 "               |
| d1                  | 8.2677 "               |
| d2                  | 7.6772 "               |
| d3                  | M200x3                 |
| a                   | 32.6772 "              |
| b                   | 9.4488 "               |
| c                   | 3.5433 "               |
| g                   | 3.8976 "               |
| g1                  | 3.2283 "               |
| h                   | 11.0236 "              |
| h1                  | 20.0787 "              |
| l                   | 10.2362 "              |
| l1                  | 14.0157 "              |
| l2                  | 0.6693 "               |
| m                   | 26.3780 "              |
| n                   | 5.1181 "               |
| u                   | 1.8898 "               |
| v                   | 2.7559 "               |
| r max               | 0.0984 "               |
| D                   | 14.1732 "              |
| oil level           | 71.0630 "              |
| oil quantity        | 103.24 in <sup>3</sup> |
| housing weight      | 1,118.18 oz            |
| Material of Housing | ductile cast           |
| Brand               | SNR                    |

| Screws             |          |
|--------------------|----------|
| fixing bolts G     | M42      |
| recommended torque | 2,040 Nm |
| Connection bolts   | M30      |
| recommended torque | 870 Nm   |
| Eye bolt(s)        | M20      |