


bearing 1	Nut	Lock washer	Feltstrips (optional)
22244	HM 44 T	MB 44	11x14x895

PDF technical sheet SNOE2442DCAF



Split plummer block housings SNOE

split plummer block housing for spherical roller bearings with cylindrical bore, made of ductile cast, for oil lubrication

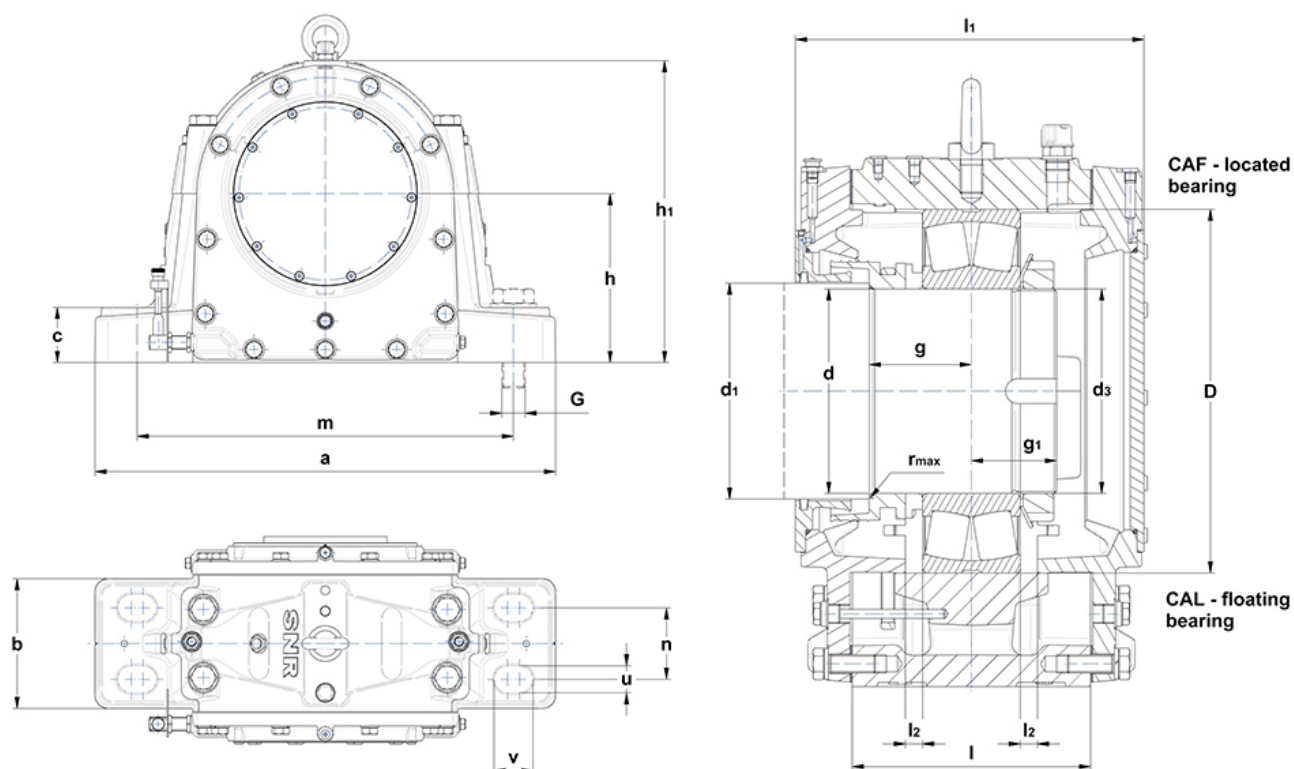

Product definition	
d	8.6614 "
d1	9.0551 "
d3	TR220x4
a	34.6457 "
b	9.4488 "
c	4.1339 "
g	4.2520 "
g1	3.6220 "
h	12.2047 "
h1	22.2441 "
l	11.0236 "
l1	15.2362 "
l2	
m	28.3465 "
n	5.1181 "
u	1.8898 "
v	2.7559 "
r max	0.0984 "
D	15.7480 "
oil level	75.6693 "
oil quantity	134.37 in ³
housing weight	1,171.10 oz
Material of Housing	ductile cast
Brand	SNR

Screws	
fixing bolts G	M42
recommended torque	2,040 Nm
Connection bolts	M36
recommended torque	1,520 Nm
Eye bolt(s)	M20