


| bearing 1 | Nut     | Lock washer | Feltstrips (optional) |
|-----------|---------|-------------|-----------------------|
| 22252     | HM 52 T | MB 52       | 11x14x1090            |

## PDF technical sheet SNOE2522DCBF



### Split plummer block housings SNOE

split plummer block housing for spherical roller bearings with cylindrical bore, made of ductile cast, for oil lubrication

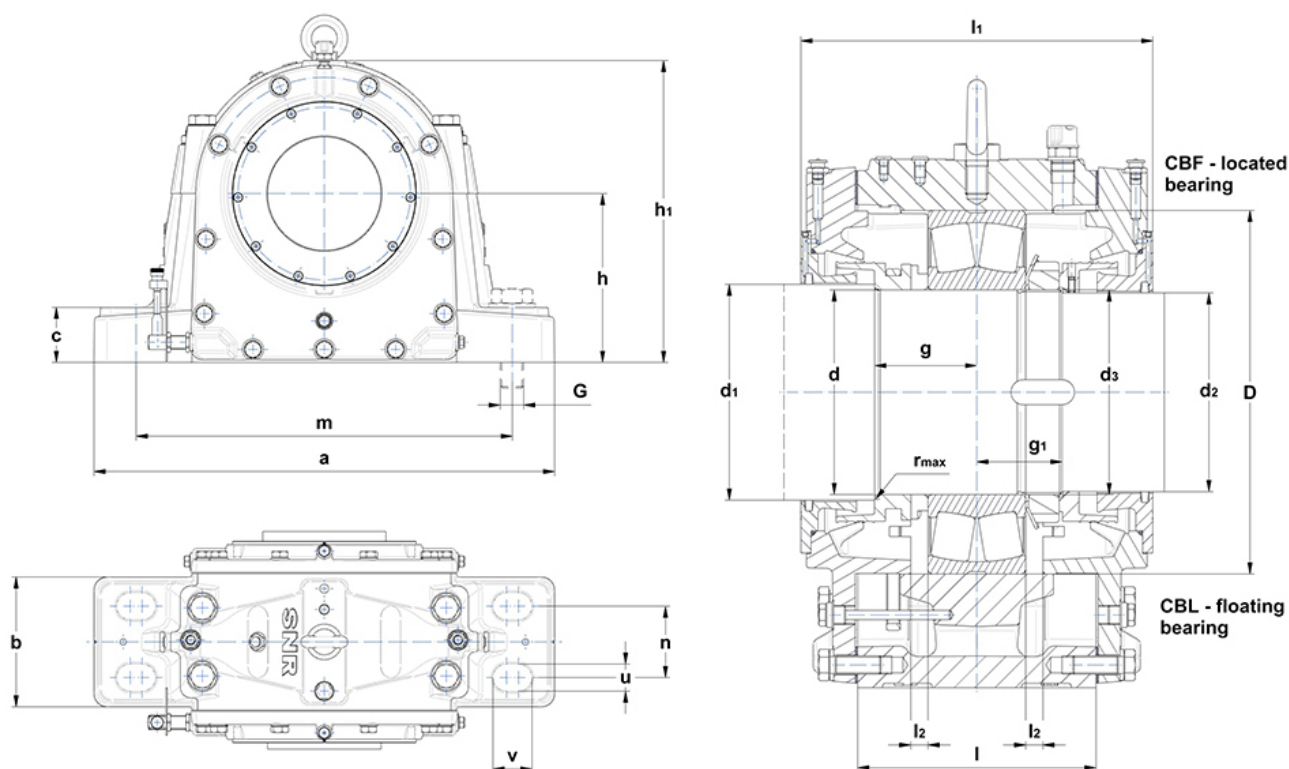

| Product definition  |                        |
|---------------------|------------------------|
| d                   | 10.2362 "              |
| d1                  | 11.0236 "              |
| d2                  | 10.0394 "              |
| d3                  | TR260x4                |
| a                   | 42.1260 "              |
| b                   | 11.8110 "              |
| c                   | 5.1181 "               |
| g                   | 4.9213 "               |
| g1                  | 4.1732 "               |
| h                   | 14.5669 "              |
| h1                  | 26.4173 "              |
| l                   | 12.9921 "              |
| l1                  | 16.9291 "              |
| l2                  |                        |
| m                   | 35.4331 "              |
| n                   | 6.4961 "               |
| u                   | 1.8898 "               |
| v                   | 2.7559 "               |
| r max               | 0.1575 "               |
| D                   | 18.8976 "              |
| oil level           | 112.3701 "             |
| oil quantity        | 196.64 in <sup>3</sup> |
| housing weight      | 1,985.92 oz            |
| Material of Housing | ductile cast           |
| Brand               | SNR                    |

| Screws             |          |
|--------------------|----------|
| fixing bolts G     | M42      |
| recommended torque | 2,040 Nm |
| Connection bolts   | M36      |
| recommended torque | 1,520 Nm |
| Eye bolt(s)        | M24      |