



## PDF technical sheet CEX20516



### Insert bearings

cylindrical outer diameter, fixing by eccentric locking collar, seal with slinger

| Product definition |          |
|--------------------|----------|
| a                  | 0.1260 " |
| b                  | 0.0531 " |
| B                  | 1.3740 " |
| B1                 | 1.7480 " |
| B2                 | 0.5315 " |
| C                  | 0.6693 " |
| C1                 | 0.1614 " |
| d                  | 1.0000 " |
| d1                 | 1.5000 " |
| D                  | 2.0472 " |
| G                  | 1/428UNF |
| m                  | 0.1969 " |
| N1                 | 1.9579 " |
| r                  | 1        |
| S                  | 0.6890 " |
| SW                 | 0.1250 " |

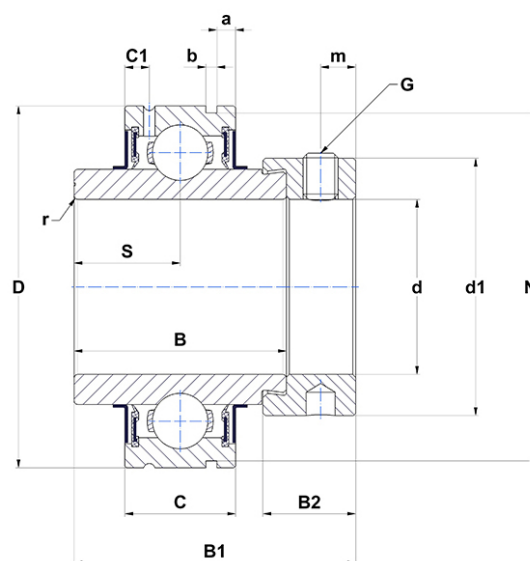

| m.ncatalog.fo.featuresotherperformance |         |
|----------------------------------------|---------|
| C                                      | 14 kN   |
| C0                                     | 7.88 kN |
| T min.                                 | -4 °C   |
| T max.                                 | 212 °C  |

| Other features                              |         |
|---------------------------------------------|---------|
| Weight                                      | 0.85 oz |
| Recommended tightening torque for set screw | 3.70 Nm |