



## PDF technical sheet CUC20927



### Insert bearings

cylindrical outer diameter, fixing by socket set screw, seal with slinger

| Product definition |           |
|--------------------|-----------|
| a                  | 0.1378 "  |
| b                  | 0.0748 "  |
| B                  | 1.9370 "  |
| C                  | 0.8661 "  |
| C1                 | 0.2008 "  |
| d                  | 1.6875 "  |
| D                  | 3.3465 "  |
| G                  | 5/1624UNF |
| m                  | 0.3150 "  |
| N1                 | 3.2209 "  |
| r                  | 1.1       |
| S                  | 0.7480 "  |
| SW                 | 0.1563 "  |

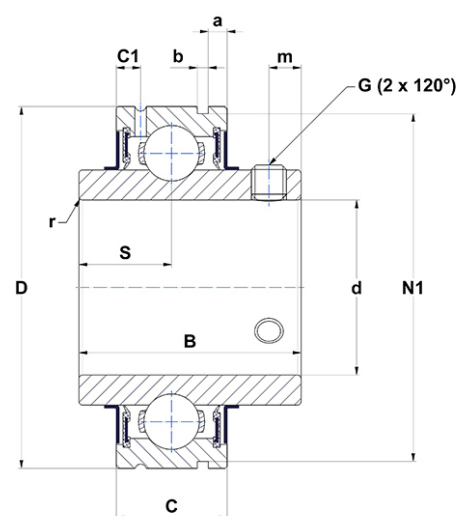

| m.ncatalog.fo.featuresotherperformance |          |
|----------------------------------------|----------|
| C                                      | 31.85 kN |
| C0                                     | 20.80 kN |
| T min.                                 | -4 °C    |
| T max.                                 | 212 °C   |

| Other features                              |         |
|---------------------------------------------|---------|
| Weight                                      | 2.61 oz |
| Recommended tightening torque for set screw | 8 Nm    |