



## PDF technical sheet UC31236G2T04



### Insert bearings

zinc-coated insert, spherical outer diameter with locking pin, fixing by socket set screw, seal with slinger, food grease

| Product definition |           |
|--------------------|-----------|
| B                  | 2.7953 "  |
| C                  | 1.4173 "  |
| C1                 | 0.4449 "  |
| d                  | 2.2500 "  |
| D                  | 5.1181 "  |
| G                  | 7/1620UNF |
| m                  | 0.4724 "  |
| r                  | 2         |
| S                  | 1.0236 "  |
| SW                 | 0.2187 "  |

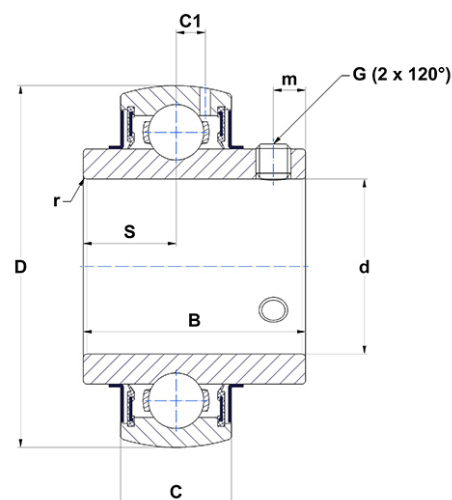

| m.ncatalog.fo.featuresotherperformance |          |
|----------------------------------------|----------|
| C                                      | 81.60 kN |
| C0                                     | 51.80 kN |
| T min.                                 | -40 °C   |
| T max.                                 | 212 °C   |

| Other features                              |          |
|---------------------------------------------|----------|
| Weight                                      | 9.35 oz  |
| Recommended tightening torque for set screw | 27.10 Nm |