



PDF technical sheet NJ2219C3




Single row cylindrical roller bearings

Single row cylindrical roller bearing, single direction for axial loads, separable, pressed steel cage.

Product definition	
d	3.7402 "
D	6.6929 "
B	1.6929 "
E	5.9646 "
F	4.4685 "
d1	4.7638 "
rs min	0.0827 "
r1s min	0.0827 "
Radial clearance class	C3
Mass (without HJ ring)	14.27 oz
Brand	NTN

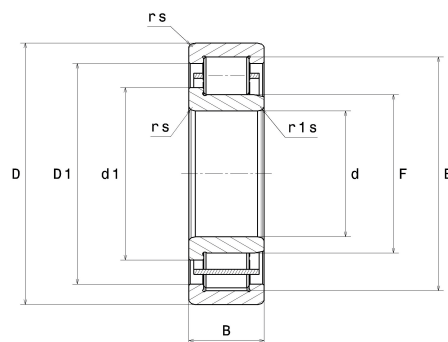

Product performance	
Dynamic load, C	230 kN
Static load, C0	298 kN
Fatigue limit load, Cu	33.40 kN
Nlim (oil)	4,300 RPM
Nlim (grease)	3,600 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	248 °C

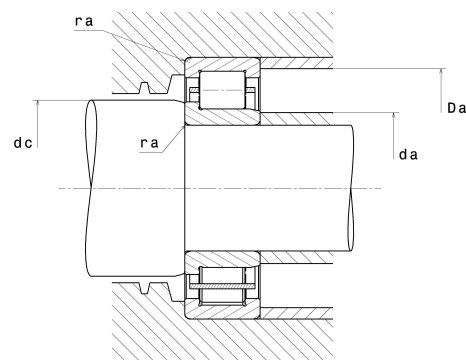

Abutment dimensions	
da min	4.1732 "
da max	4.3701 "
dc min	4.8425 "
Da max	6.2598 "
ra max	0.0787 "

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$P_0 = Fr$$