


PDF technical sheet 23192BKC3




Double row spherical roller bearings

Spherical roller bearing, with central rib on inner ring, 2-part machined cage centred on inner ring, groove and lubrication holes on outer ring, tapered bore 1:12

Product definition	
d	18.1102 "
D	29.9213 "
B	9.4488 "
d2	21.9685 "
D1	25.9724 "
rs min	0.2953 "
Number of lubrication holes	8
b	1.2992 "
k	0.7874 "
Associated sleeve reference	H3192
e	0.31
Y1	2.19
Y2	3.27
Y0	2.15
Radial clearance class	C3
Brand	NTN

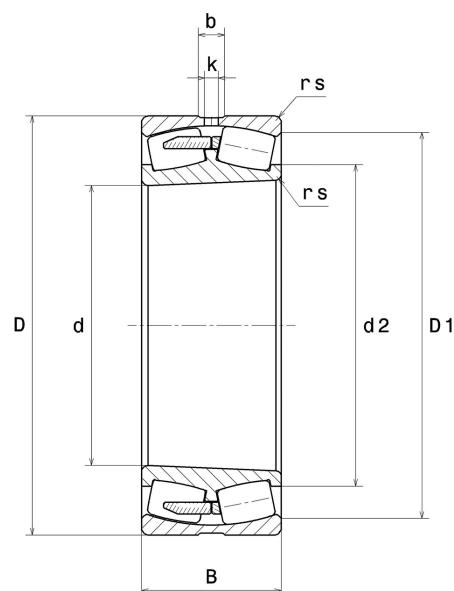

Product performance	
Dynamic load, C	5,700 kN
Static load, C0	11,400 kN
Fatigue limit load, Cu	812 kN
Nref	400 RPM
Nlim	670 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	248 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	8.43 Hz
Characteristic outer ring frequency, BPF0	10.18 Hz
Characteristic inner ring frequency, BPF1	12.82 Hz

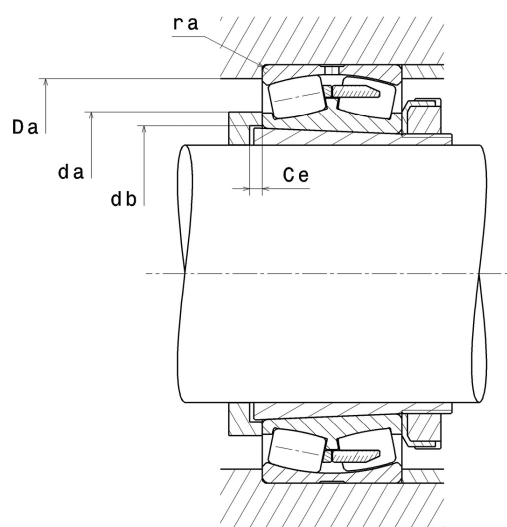

Abutment dimensions

da min	19.3701 "
db min	19.0551 "
Ce min	0.6693 "
Da max	28.6614 "
ra max	0.2362 "

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .