


PDF technical sheet 21307.VKC3




Double row spherical roller bearings

Spherical roller bearing, pressed steel cage, tapered bore 1:12

Product definition	
d	1.3780 "
D	3.1496 "
B	0.8268 "
d2	1.8228 "
D1	2.7953 "
rs min	0.0591 "
Number of lubrication holes	
Associated sleeve reference	H307
e	0.27
Y1	2.48
Y2	3.69
Y0	2.42
Radial clearance class	C3
Mass	1.78 oz
Brand	SNR

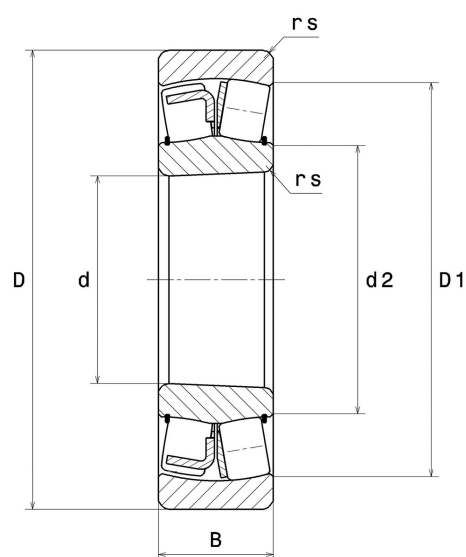

Product performance	
Dynamic load, C	83.10 kN
Static load, C0	66 kN
Fatigue limit load, Cu	8.75 kN
Nref	7,100 RPM
Nlim	11,000 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	392 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	5.15 Hz
Characteristic outer ring frequency, BPF0	5.30 Hz
Characteristic inner ring frequency, BPF1	7.70 Hz

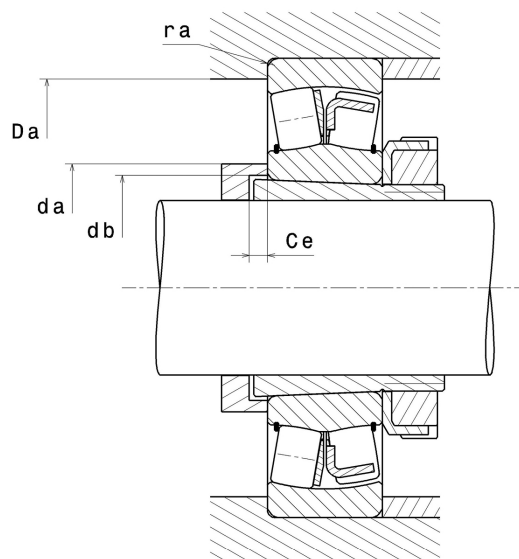

Abutment dimensions

da min	1.7323 "
Da max	2.7953 "
ra max	0.0591 "

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .