

PDF technical sheet


22206EAC4




Double row spherical roller bearings

Spherical roller bearing, pressed steel cage

Product definition	
d	1.1811 "
D	2.4409 "
B	0.7874 "
d2	1.4764 "
D1	2.1378 "
rs min	0.0394 "
Number of lubrication holes	
e	0.31
Y1	2.15
Y2	3.2
Y0	2.1
Radial clearance class	C4
Mass	0.96 oz
Brand	SNR

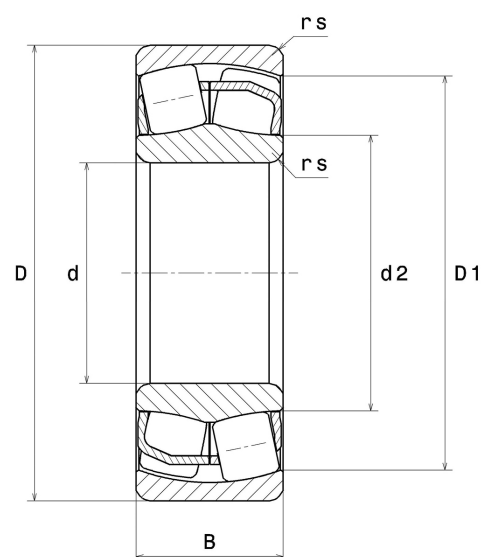

Product performance	
Dynamic load, C	75.70 kN
Static load, C0	64.50 kN
Fatigue limit load, Cu	6.50 kN
Nref	11,000 RPM
Nlim	14,000 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	392 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	5.25 Hz
Characteristic outer ring frequency, BPF0	6.15 Hz
Characteristic inner ring frequency, BPF1	8.85 Hz

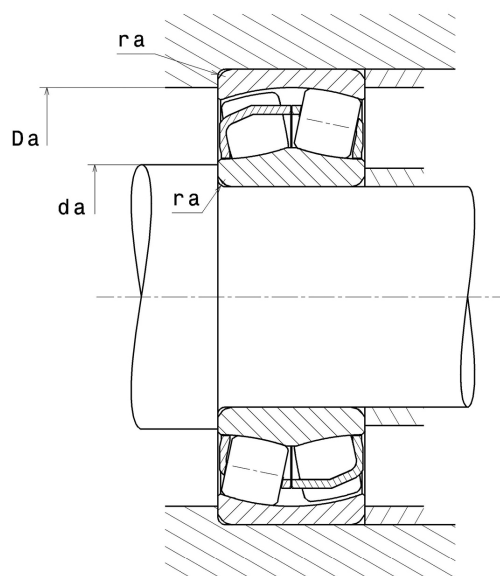

Abutment dimensions

da min	1.4016 "
Da max	2.2205 "
ra max	0.0394 "

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

Fa / Fr ≤ e		Fa / Fr > e	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X ₀	Y ₀
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .