


PDF technical sheet 22313EG15KW33C4



Double row spherical roller bearings

Spherical roller bearing, polyamide cage, groove and lubrication holes on outer ring, tapered bore 1:12

Product definition	
d	2.5591 "
D	5.5118 "
B	1.8898 "
d2	3.2008 "
D1	4.7717 "
rs min	0.0827 "
Number of lubrication holes	3
b	0.3622 "
k	0.1575 "
Associated sleeve reference	H2313
e	0.33
Y1	2.06
Y2	3.06
Y0	2.01
Radial clearance class	C4
Mass	11.46 oz
Brand	SNR

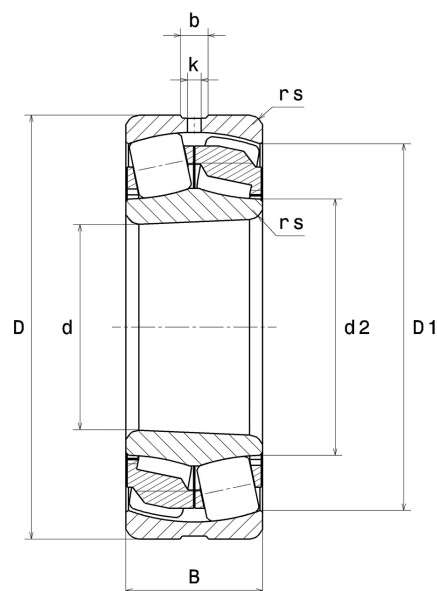

Product performance	
Dynamic load, C	369 kN
Static load, C0	343 kN
Fatigue limit load, Cu	33.90 kN
Nref	4,000 RPM
Nlim	4,800 RPM
Min operating temperature, Tmin	-4 °C
Max operating temperature, Tmax	248 °C
Characteristic cage frequency, FTF	0.40 Hz
Characteristic rolling element frequency, BSF	4.75 Hz
Characteristic outer ring frequency, BPF0	5.62 Hz
Characteristic inner ring frequency, BPF1	8.39 Hz



Abutment dimensions

da min	3.0315 "
db min	2.8346 "
Ce min	0.2362 "
Da max	5.0394 "
ra max	0.0787 "

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .