


PDF technical sheet 22340EKF800




Double row spherical roller bearings

Spherical roller bearing for vibratory applications, one-piece machined cage, groove and lubrication holes on outer ring, tapered bore 1:12, special C4 class clearance

Product definition	
d	7.8740 "
D	16.5354 "
B	5.4331 "
d2	11.0236 "
D1	14.2953 "
rs min	0.1969 "
Number of lubrication holes	3
b	0.8307 "
k	0.3937 "
Associated sleeve reference	H2340
e	0.31
Y1	2.15
Y2	3.2
Y0	2.1
Radial clearance class	C4 Special
Mass	335.10 oz
Brand	SNR

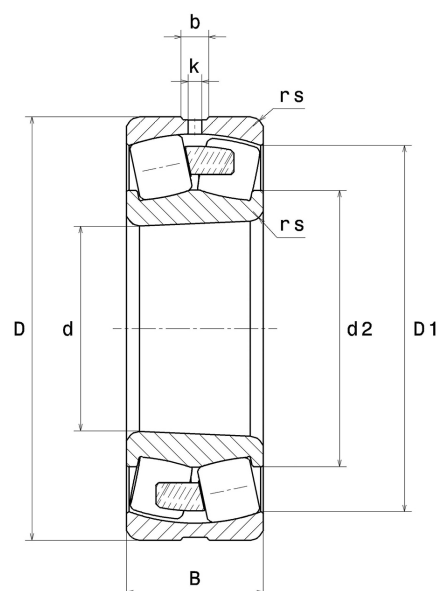

Product performance	
Dynamic load, C	2,830 kN
Static load, C0	3,530 kN
Fatigue limit load, Cu	229 kN
Nref	1,000 RPM
Nlim	1,500 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	392 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	5.96 Hz
Characteristic outer ring frequency, BPF0	7.56 Hz
Characteristic inner ring frequency, BPF1	10.44 Hz

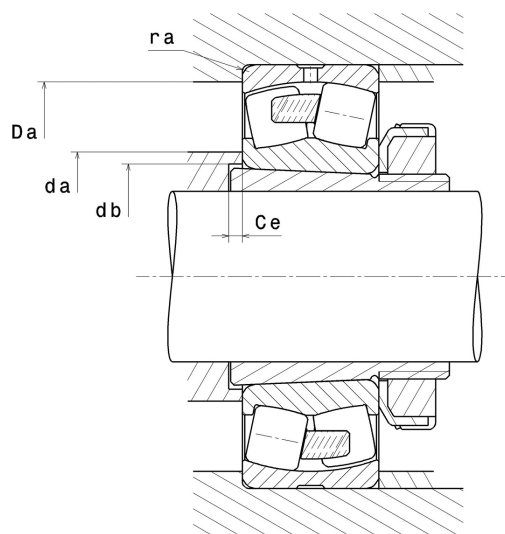

Abutment dimensions

da min	8.6614 "
db min	8.5039 "
Ce min	0.3543 "
Da max	15.7480 "
ra max	0.1575 "

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .