

PDF technical sheet


23132EAW33C4




Double row spherical roller bearings

Spherical roller bearing, pressed steel cage, groove and lubrication holes on outer ring

Product definition	
d	6.2992 "
D	10.6299 "
B	3.3858 "
d2	7.3110 "
D1	9.4409 "
rs min	0.0827 "
Number of lubrication holes	3
b	0.5394 "
k	0.2362 "
e	0.29
Y1	2.35
Y2	3.5
Y0	2.3
Radial clearance class	C4
Mass	70.97 oz
Brand	SNR

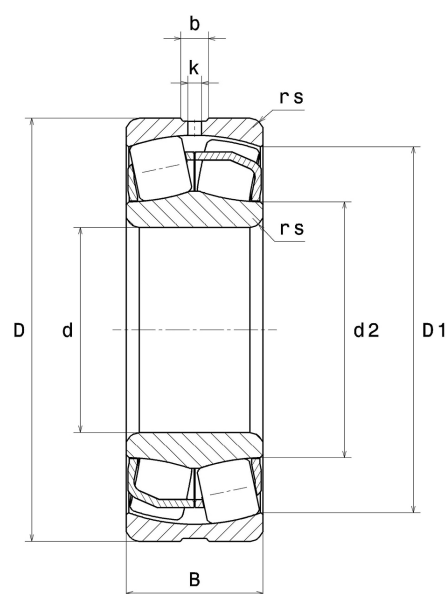

Product performance	
Dynamic load, C	1,220 kN
Static load, C0	1,580 kN
Fatigue limit load, Cu	106 kN
Nref	1,800 RPM
Nlim	2,400 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	392 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	7.31 Hz
Characteristic outer ring frequency, BPF0	9.11 Hz
Characteristic inner ring frequency, BPF1	11.89 Hz

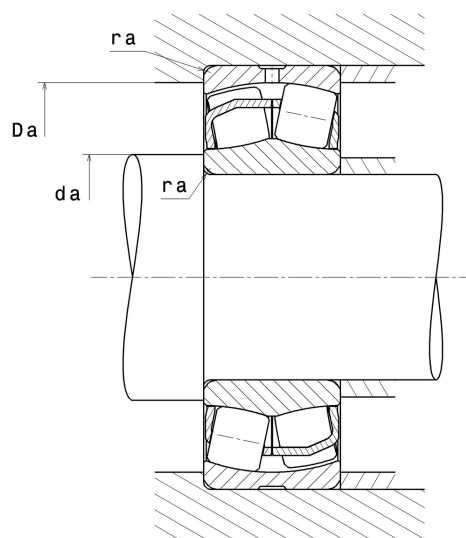

Abutment dimensions

da min	6.7717 "
Da max	10.1575 "
ra max	0.0787 "

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .