

PDF technical sheet


24152VMW33C2




Double row spherical roller bearings

Spherical roller bearing, with central rib on inner ring, one-piece machined cage centred on inner ring, groove and lubrication holes on outer ring

Product definition	
d	10.2362 "
D	17.3228 "
B	7.0866 "
D1	14.5039 "
rs min	0.1575 "
Number of lubrication holes	3
b	0.5472 "
k	0.2953 "
e	0.39
Y1	1.75
Y2	2.6
Y0	1.71
Radial clearance class	C2
Mass	405.65 oz
Brand	SNR

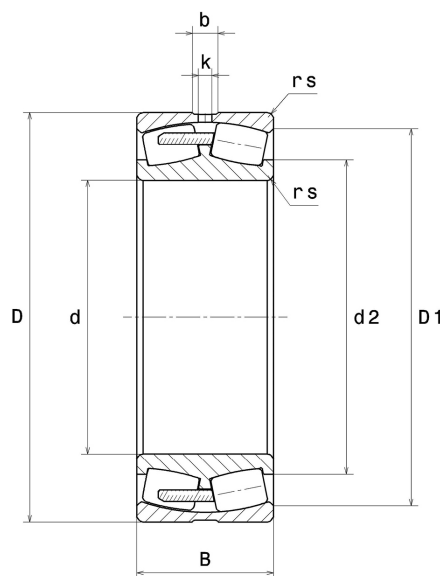

Product performance	
Dynamic load, C	2,750 kN
Static load, C0	5,240 kN
Fatigue limit load, Cu	248 kN
Nref	640 RPM
Nlim	1,200 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	392 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	7.86 Hz
Characteristic outer ring frequency, BPF0	9.66 Hz
Characteristic inner ring frequency, BPF1	12.34 Hz

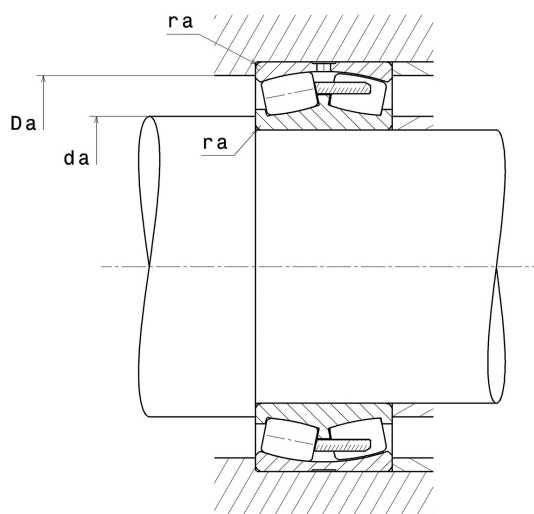

Abutment dimensions

da min	10.9055 "
Da max	16.6535 "
ra max	0.1181 "

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .