

PDF technical sheet 4T48685/48620




Single row tapered roller bearings

Tapered roller bearing, pressed steel cage

Product definition	
d	5.6250 "
D	7.8750 "
B	1.5625 "
C	1.3437 "
T	1.6250 "
d1	6.7913 "
a	1.5030 "
e	0.34
Y2	1.78
Y0	0.98
Mass	13.72 oz
Brand	BOWER



Product performance	
Dynamic load, C	239 kN
Rating life coefficient, A2	1.4
Static load, C0	490 kN
Fatigue limit load, Cu	50.80 kN
Nlim (oil)	2,100 RPM
Nlim (grease)	1,600 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	248 °C
Characteristic cage frequency, FTF	0.47 Hz
Characteristic rolling element frequency, BSF	14.63 Hz
Characteristic outer ring frequency, BPF0	17.27 Hz
Characteristic inner ring frequency, BPFI	19.73 Hz

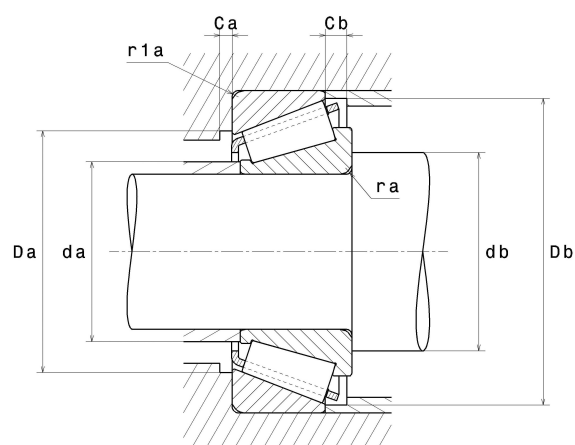

Abutment dimensions	
ra max	0.1378 "
r1a max	0.1299 "

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.5	Y0

If $P_0 < F_r$, then use $P_0 = F_r$

The values for e, Y2 and Y0 are shown in the above table