


## PDF technical sheet 33015U



### Single row tapered roller bearings

Tapered roller bearing, pressed steel cage

| Product definition |          |
|--------------------|----------|
| d                  | 2.9528 " |
| D                  | 4.5276 " |
| B                  | 1.2205 " |
| C                  | 1.0039 " |
| T                  | 1.2205 " |
| a                  | 0.9055 " |
| rs min             | 0.0591 " |
| r1s min            | 0.0591 " |
| e                  | 0.3      |
| Y2                 | 2.01     |
| Y0                 | 1.11     |
| Mass               | 3.92 oz  |
| ISO 355 reference  | T2CE075  |
| Brand              | NTN      |

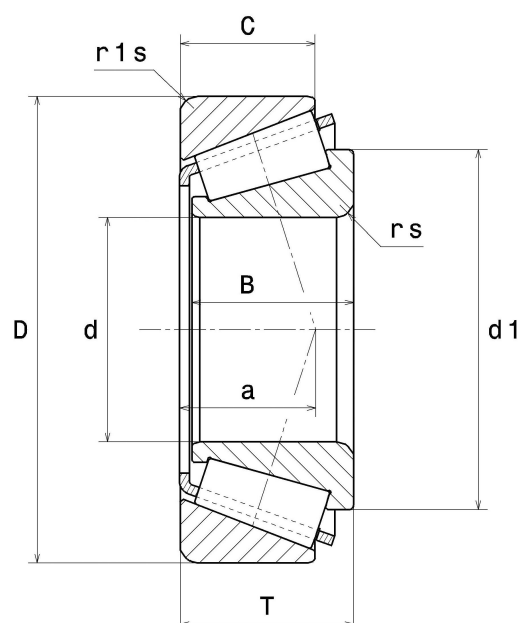

| Product performance             |           |
|---------------------------------|-----------|
| Dynamic load, C                 | 111 kN    |
| Rating life coefficient, A2     | 1         |
| Static load, C0                 | 186 kN    |
| Fatigue limit load, Cu          | 22.70 kN  |
| Nlim (oil)                      | 4,000 RPM |
| Nlim (grease)                   | 3,000 RPM |
| Min operating temperature, Tmin | -40 °C    |
| Max operating temperature, Tmax | 248 °C    |



### Abutment dimensions

|         |          |
|---------|----------|
| da max  | 3.2874 " |
| db min  | 3.3465 " |
| Da max  | 4.1929 " |
| Db min  | 4.3504 " |
| ra max  | 0.0591 " |
| r1a max | 0.0591 " |

### Calculation factors

#### Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

| $F_a / F_r \leq e$ |   | $F_a / F_r > e$ |    |
|--------------------|---|-----------------|----|
| X                  | Y | X               | Y  |
| 1                  | 0 | 0.4             | Y2 |

#### Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

| $X_0$ | $Y_0$ |
|-------|-------|
| 0.5   | Y0    |

If  $P_0 < F_r$ , then use  $P_0 = F_r$

The values for e, Y2 and Y0 are shown in the above table