


PDF technical sheet 4TLM104912



Single row tapered roller bearings cup

Product definition	
D	3.2650 "
C	0.6500 "
Brand	NTN

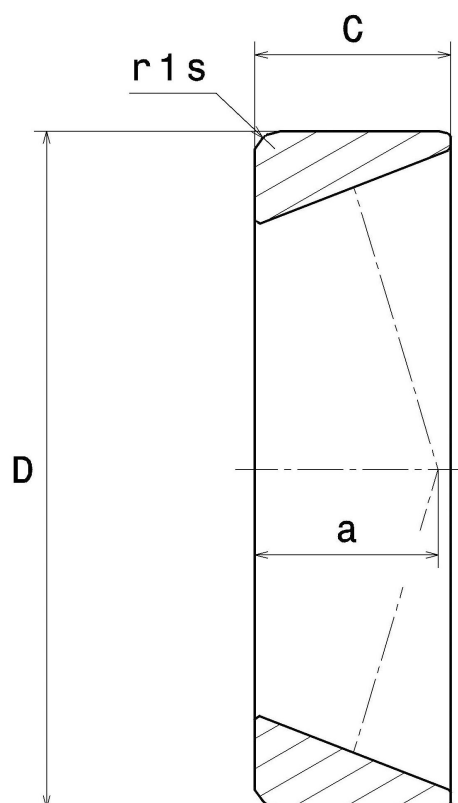

Product performance

Min operating temperature, T _{min}	-40 °C
Max operating temperature, T _{max}	248 °C



Abutment dimensions

r _{1a} max	0.0512 "
---------------------	----------

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	0	0.4	Y ₂

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.5	Y ₀

If $P_0 < F_r$, then use $P_0 = F_r$

The values for e, Y₂ and Y₀ are shown in the above table