


PDF technical sheet 4TNA95500/95927CD




Single row tapered roller bearings

Tapered roller bearing, pressed steel cage

Product definition	
d	5.0000 "
D	9.2500 "
B	2.5000 "
C	1.9375 "
T	2.5000 "
d1	7.0866 "
a	1.9488 "
e	0.37
Y2	1.62
Y0	0.89
Mass	42.33 oz
Brand	NTN

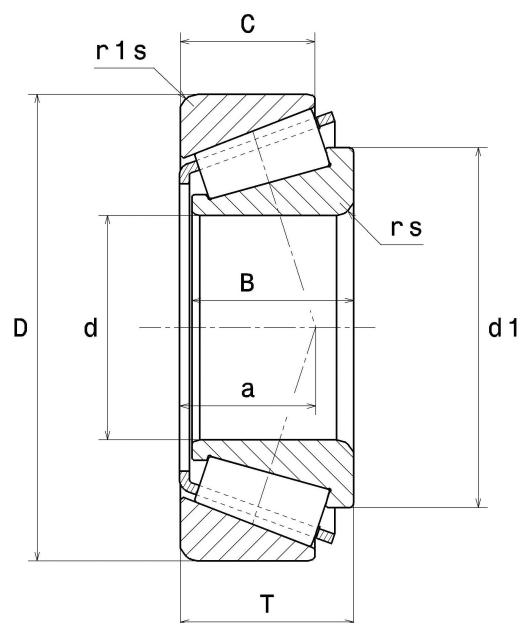

Product performance	
Dynamic load, C	525 kN
Rating life coefficient, A2	1.4
Static load, C0	825 kN
Fatigue limit load, Cu	84.20 kN
Nlim (oil)	2,000 RPM
Nlim (grease)	1,500 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	248 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	7.57 Hz
Characteristic outer ring frequency, BPF0	9.17 Hz
Characteristic inner ring frequency, BPFI	11.83 Hz

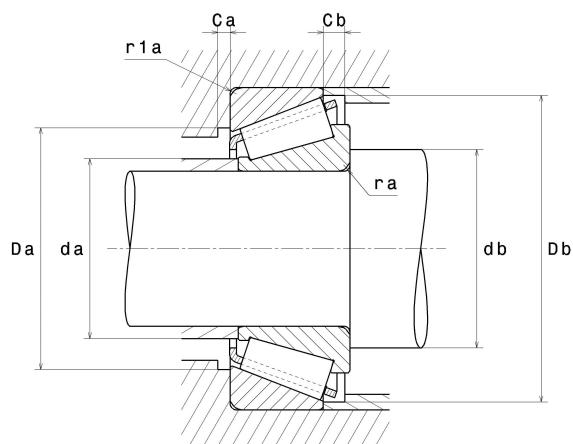

Abutment dimensions	
ra max	0.2520 "
r1a max	0.1299 "

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$F_a / F_r \leq e$		$F_a / F_r > e$	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.5	Y0

If $P_0 < F_r$, then use $P_0 = F_r$

The values for e, Y2 and Y0 are shown in the above table