


Gehäuse
 Spindel
 Handrad
 Dichtmaterial
 Betriebsdruck max.
 Betriebstemperatur

Messing vernickelt
 Messing blank
 Kunststoff
 NBR
 18 bar
 -10 °C bis 80 °C

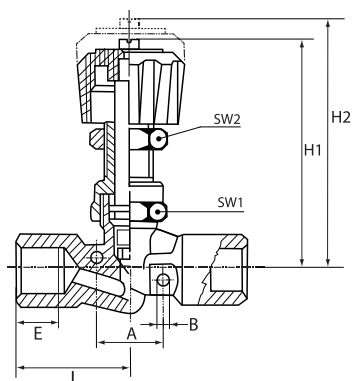

Nadelventil, Innen-/Innengewinde												
Artikel Nr.	Typen Nr.	Gewinde	DN	A mm	B mm	L mm	E mm	F mm	H1 mm	H2 mm	SW1 mm	
136226	210.79-N	G 1/8 IG	4	20,5	4,5	51,6	6,7	6,7	38,2	42,8	19	
136227	210.80-N	G 1/4 IG	4	20,5	4,5	57,0	8,0	8,0	38,2	42,8	19	
136228	210.81-N	G 3/8 IG	8	21,0	4,5	63,0	10,0	10,0	52,7	59,9	21	
136229	210.82-N	G 1/2 IG	8	21,0	4,5	69,0	11,0	11,0	52,7	59,9	21	

Nadelventil, Innen-/Innengewinde, mit Schottgewinde für Schalttafeleinbau												
Artikel Nr.	Typen Nr.	Gewinde	DN	A mm	B mm	L mm	E mm	F mm	H1 mm	H2 mm	SW1 mm	SW2 mm
136230	210.89-N	G 1/8 IG	4	20,5	4,5	51,6	6,7	6,7	51,0	56,0	19	17
136231	210.90-N	G 1/4 IG	4	20,5	4,5	57,0	8,0	8,0	51,0	56,0	19	17
136232	210.91-N	G 3/8 IG	8	21,0	4,5	63,0	10,0	10,0	70,2	77,4	21	17
136233	210.92-N	G 1/2 IG	8	21,0	4,5	69,0	11,0	11,0	70,2	77,4	21	17

Nadelventil, Innen-/Außengewinde												
Artikel Nr.	Typen Nr.	Gewinde	DN	A mm	B mm	L mm	E mm	F mm	H1 mm	H2 mm	SW1 mm	
136234	212.39-N	G 1/8 IG/AG	4	20,5	4,5	52,3	6,7	8,5	38,2	42,8	19	
136235	212.40-N	G 1/4 IG/AG	4	20,5	4,5	53,0	8,0	8,5	38,2	42,8	19	
136236	212.41-N	G 3/8 IG/AG	8	21,0	4,5	56,5	10,0	9,0	52,7	59,9	21	
136237	212.42-N	G 1/2 IG/AG	8	21,0	4,5	63,5	11,0	11,0	52,7	59,9	21	

Nadelventil, Außen-/Außengewinde												
Artikel Nr.	Typen Nr.	Gewinde	DN	A mm	B mm	L mm	E mm	F mm	H1 mm	H2 mm	SW1 mm	
136238	213.39-N	G 1/8 AG	4	20,5	4,5	53,0	8,5	8,5	38,2	42,8	19	
136239	213.40-N	G 1/4 AG	4	20,5	4,5	59,0	8,5	8,5	38,2	42,8	19	
136240	213.41-N	G 3/8 AG	8	21,0	4,5	52,0	9,0	9,0	52,7	59,9	19	
136241	213.42-N	G 1/2 AG	8	21,0	4,5	58,0	11,0	11,0	52,7	59,9	21	



210.80-N



210.90-N



212.40-N



213.40-N