


771-LM...

Steckschlüssel-Einsätze 1/2", metrisch

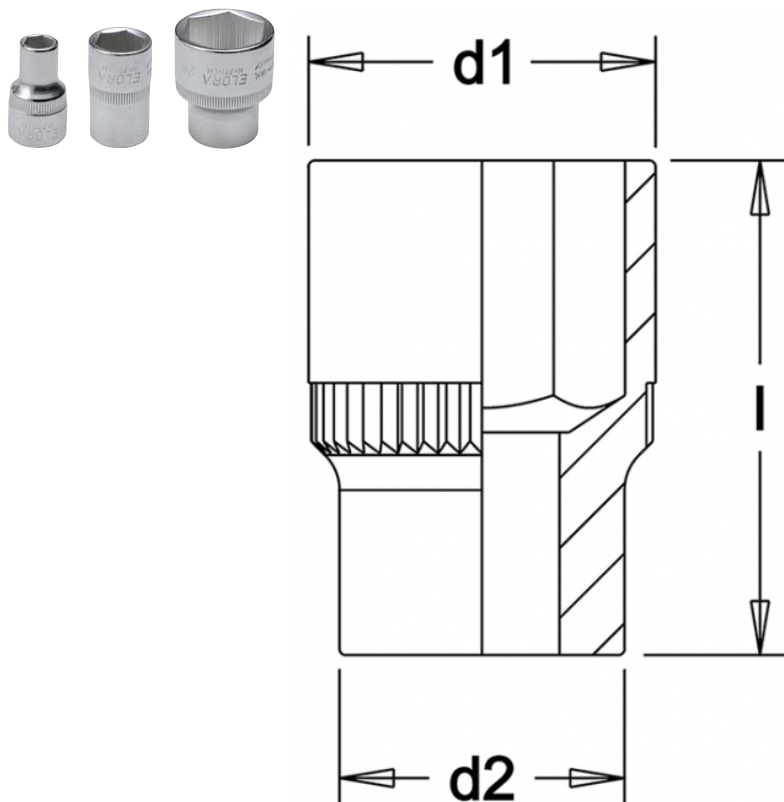

12,5

1/2"



Details

- warm geschmiedet
- verchromt, poliert
- gerändelt
- ELORA-Chrom-Vanadium 31CrV3 / 1.2208
- Innenvierkant nach DIN 3120-C 12,5, ISO 1174, mit Kugelfangrille
- Ausführung nach DIN 3124, ISO 2725-1



Herstellerangaben ↓

Code	Nummer	Länge mm	d1 mm	d2 mm	Gewicht g
0771000052000	771-LM 5	40	8,2	23,0	56
0771000052001	771-LM 5,5	40	9,0	23,0	56
0771000062000	771-LM 6	40	9,4	23,0	56
0771000072000	771-LM 7	40	11,0	23,0	56
0771000082000	771-LM 8	40	12,0	23,0	56
0771000092000	771-LM 9	40	13,4	23,0	56

Code	Nummer	Länge mm	d1 mm	d2 mm	Gewicht g
0771000102000	771-LM 10	40	15,1	23,0	56
0771000112000	771-LM 11	40	16,3	23,0	58
0771000122000	771-LM 12	40	17,7	23,0	58
0771000132000	771-LM 13	40	18,7	23,0	58
0771000142000	771-LM 14	40	20,2	23,0	60
0771000152000	771-LM 15	40	21,5	23,0	62
0771000162000	771-LM 16	40	22,7	23,0	66
0771000172000	771-LM 17	40	24,1	23,0	66
0771000182000	771-LM 18	40	25,3	23,0	66
0771000192000	771-LM 19	40	26,5	23,0	66
0771000202000	771-LM 20	40	27,8	23,0	72
0771000212000	771-LM 21	40	28,8	24,0	74
0771000222000	771-LM 22	40	30,2	23,7	86
0771000232000	771-LM 23	40	31,2	24,7	88
0771000242000	771-LM 24	40	32,6	24,8	96
0771000252000	771-LM 25	42	33,8	26,1	106
0771000262000	771-LM 26	42	35,2	24,9	108
0771000272000	771-LM 27	44	36,5	26,2	126
0771000282000	771-LM 28	44	37,5	27,2	140
0771000292000	771-LM 29	44	38,9	27,7	145
0771000302000	771-LM 30	44	40,1	28,0	150
0771000322000	771-LM 32	46	42,6	28,0	180
0771000332000	771-LM 33	46	43,9	28,0	180
0771000342000	771-LM 34	46	44,9	29,0	195
0771000362000	771-LM 36	55	49,0	32,0	275