

Doppelgewindenippel

Material:

Gewinde:

Medien:

Betriebstemperatur:

Druck:


Messing vernickelt

mit zylindrischen Außengewinden

für Luft, Wasser, Öl, Dampf etc.

max. 150°C

max. 60 bar

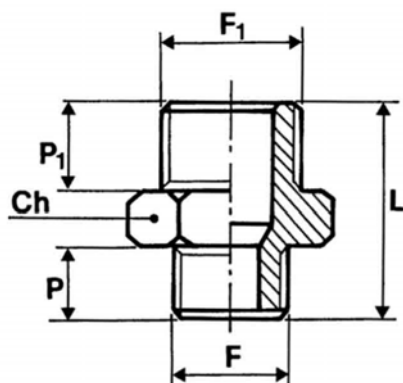

252.62

Doppelgewindenippel, Außengewinde zylindrisch

Art.-Nr.	F	F1	Ch	P	P1	L
252.31	M5	M5	8	4,0	4,0	11,5
252.32	M5	G 1/8	14	4,0	6,0	14,5
252.33	G 1/8	G 1/8	14	6,0	6,0	17,0
252.34	G 1/8	G 1/4	17	6,0	8,0	19,0
252.35	G 1/8	G 3/8	20	6,0	9,0	20,0
252.61	G 1/4	G 1/4	17	8,0	8,0	21,0
252.62	G 1/4	G 3/8	20	8,0	9,0	22,0
252.63	G 1/4	G 1/2	25	8,0	10,0	24,0
252.64	G 3/8	G 3/8	20	9,0	9,0	24,0
252.65	G 3/8	G 1/2	25	9,0	10,0	25,5
252.66	G 1/2	G 1/2	25	10,0	10,0	26,5