



Material: Messing, vernickelt
 Dichtmaterial: Buna-N
 Arbeitsdruck: max. 18 bar

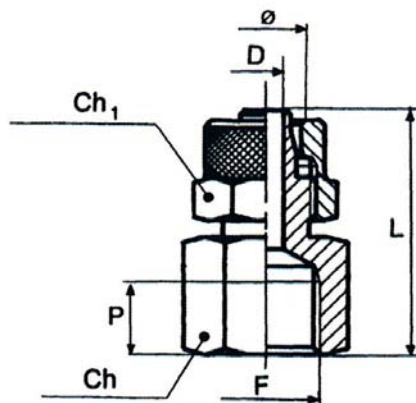

11.514-8

Gerade Aufschraubverschraubung, Innengewinde

Art.-Nr.	Ø	F	Ch	Ch1	Gewinde Ch1	P	L	D
11.518-6	6/4	G 1/8	14	12	M 10 x 1	7,0	26,5	3,0
11.518-8	8/6	G 1/8	14	14	M 12 x 1	7,0	26,5	5,0
11.514-6	6/4	G 1/4	17	12	M 10 x 1	8,0	29,5	3,0
11.514-8	8/6	G 1/4	17	14	M 12 x 1	8,0	29,0	5,0
11.514-10	10/8	G 1/4	17	16	M 14 x 1	8,0	31,0	6,8
11.538-6	6/4	G 3/8	20	12	M 10 x 1	11,5	29,5	3,0
11.538-8	8/6	G 3/8	20	14	M 12 x 1	10,0	33,0	5,0
11.538-10	10/8	G 3/8	20	16	M 14 x 1	10,0	35,0	6,8
11.512-8	8/6	G 1/2	24	12	M 12 x 1	15,5	30,0	5,0
11.512-10	10/8	G 1/2	24	16	M 14 x 1	11,0	38,0	6,8