
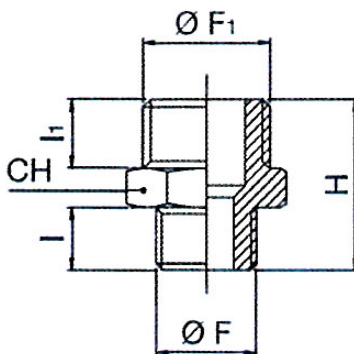


Standardverschraubungen »value line«

- Messing vernickelt -

Für Luft, Wasser, Dampf, Öl etc.

max. Betriebsdruck: 60 bar
max. Betriebstemperatur: 150 °C



252.62-E

Doppelgewindenippel

Art.-Nr.	F	F1	I	I1	H	CH
252.31-E	M5	M5	4	4	11,5	8
252.33-E	G 1/8	G 1/8	6	6	16,5	14
252.34-E	G 1/8	G 1/4	6	8	19,0	17
252.61-E	G 1/4	G 1/4	8	8	21,0	17
252.62-E	G 1/4	G 3/8	8	9	22,0	19
252.63-E	G 1/4	G 1/2	8	10	23,5	24
252.64-E	G 3/8	G 3/8	9	9	23,0	19
252.65-E	G 3/8	G 1/2	9	10	24,5	24
252.66-E	G 1/2	G 1/2	10	10	25,5	24