


Material: Messing, vernickelt
 Dichtmaterial: Buna-N
 Arbeitsdruck: max. 18 bar

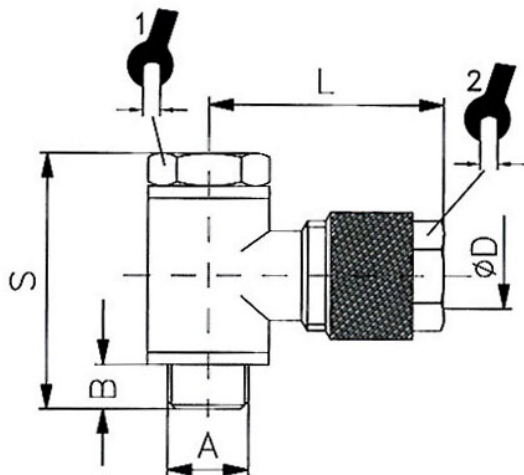

13.614-8

Winkel-Schwenkverschraubung, Außengewinde zylindrisch mit O-Ring

Art.-Nr.	ØD	A	B	S	L	 1	Gewinde SW1	 2
13.605-5	5/3	M5	3,9	17,5	16,5	8	M 7 x 0,75	8
13.605-6	6/4	M5	3,9	17,5	16,5	8	M 8 x 0,75	8
13.618-5	5/3	G 1/8	7,0	28,0	24,0	14	M 7 x 0,75	9
13.618-6	6/4	G 1/8	5,5	28,0	24,0	14	M 10 x 1	12
13.618-8	8/6	G 1/8	5,5	28,0	24,0	14	M 12 x 1	14
13.618-10	10/8	G 1/8	6,0	28,0	24,0	14	M 14 x 1	14
13.614-6	6/4	G 1/4	6,5	33,0	27,0	17	M 10 x 1	12
13.614-8	8/6	G 1/4	6,5	33,0	26,0	17	M 12 x 1	14
13.614-10	10/8	G 1/4	6,5	33,0	28,0	17	M 14 x 1	16
13.638-6	6/4	G 3/8	9,0	37,0	26,0	19	M 10 x 1	10
13.638-8	8/6	G 3/8	9,0	37,0	28,0	20	M 12 x 1	14
13.638-10	10/8	G 3/8	9,0	37,0	29,0	20	M 14 x 1	16
13.638-12	12/10	G 3/8	9,0	36,0	32,0	5	M 16 x 1	19
13.612-8	8/6	G 1/2	10,0	42,0	31,2	24	M 12 x 1	12
13.612-10	10/8	G 1/2	11,0	42,0	31,0	27	M 14 x 1	16
13.612-12	12/10	G 1/2	11,0	42,0	33,0	8	M 16 x 1	19