


- aus Kunststoff (POM) blau -

Betriebsdruck: 0 - 10 bar
Temperaturbereich: -10 °C bis +60 °C




13.665


Winkelverschraubung mit Alu-Hohlschraube, drehbar

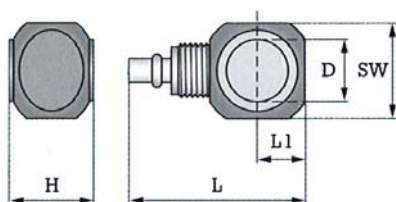

Art.-Nr.	Gewinde	für Schlauch	NW mm	SW	D	L	L ₁	H
13.660	G 1/8	6/4	3,0	16	10	31,0	8	16,5
13.661	G 1/8	8/6	4,5	16	10	33,0	8	16,5
13.665	G 1/4	6/4	3,0	20	13	35,0	10	16,5
13.666	G 1/4	8/6	4,5	20	13	36,5	10	16,5

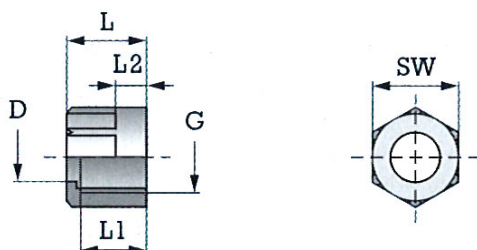

Art.-Nr.	für Schlauch	Gewinde	SW	D	L	L ₁	L ₂
13.660, 13.661	6/4	M 10 x 1	12	6,2	13	10,5	5
13.665, 13.666	8/6	M 12 x 1	14	8,2	13	10,5	5



Art.-Nr.	Gewinde	L	L ₁	L ₂	SW	Werkstoff
13.660, 13.661	G 1/8	27	8	8	14	Alu eloxiert blau
13.665, 13.666	G 1/4	29	10	8	17	Alu eloxiert blau