


Material: Messing, vernickelt
 Dichtmaterial: Buna-N
 Arbeitsdruck: max. 18 bar

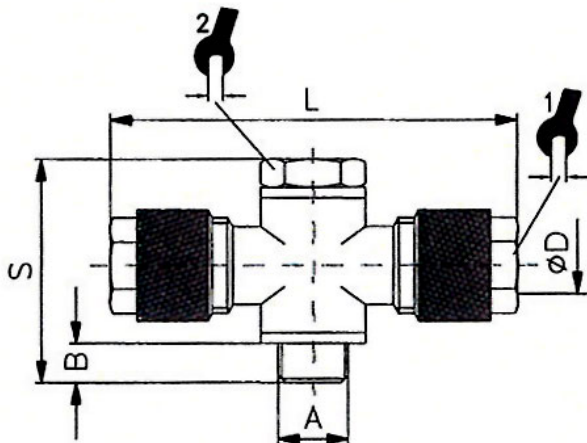

14.214-8

T-Schwenkverschraubung, Außengewinde zylindrisch mit O-Ring

Art.-Nr.	ØD	A	B	S	L	 1	Gewinde SW 1	 2
14.205-5	5/3	M5	3,9	17,5	33,0	8	M 7 x 0,75	8
14.205-6	6/4	M5	3,9	17,5	33,0	9	M 8 x 0,75	8
14.218-5	5/3	G 1/8	3,9	28,0	46,6	8	M 7 x 0,75	14
14.218-6	6/4	G 1/8	6,0	28,0	46,6	10	M 10 x 1	14
14.218-8	8/6	G 1/8	6,0	28,0	50,0	12	M 12 x 1	14
14.218-10	10/8	G 1/8	6,0	28,0	53,0	14	M 14 x 1	14
14.214-6	6/4	G 1/4	6,5	33,0	53,0	12	M 10 x 1	17
14.214-8	8/6	G 1/4	6,5	33,0	52,0	14	M 12 x 1	17
14.214-10	10/8	G 1/4	6,5	33,0	55,0	16	M 14 x 1	17
14.238-6	6/4	G 3/8	9,5	37,0	53,6	10	M 10 x 1	22
14.238-8	8/6	G 3/8	9,0	37,0	57,0	14	M 12 x 1	20
14.238-10	10/8	G 3/8	9,0	36,0	57,0	16	M 14 x 1	20
14.238-12	12/10	G 3/8	9,0	33,0	64,0	19	M 16 x 1	20
14.212-10	10/8	G 1/2	11,0	42,0	61,0	16	M 14 x 1	27
14.212-12	12/10	G 1/2	11,0	42,0	67,0	19	M 16 x 1	27