

Schottverschraubung

Material:

Gewinde:

Medien:

Betriebstemperatur:

Druck:


Messing vernickelt

mit zylindrischen Außengewinden

für Luft, Wasser, Öl, Dampf etc.

max. 150°C

max. 60 bar

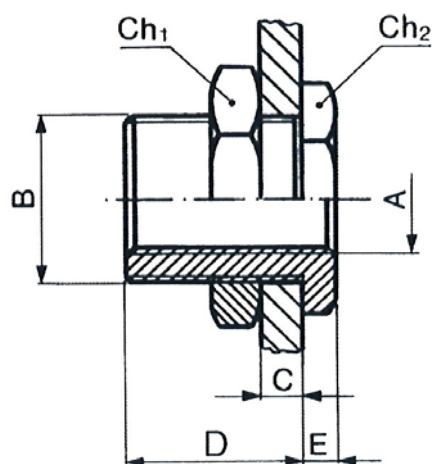

232.04-N

Schottverschraubung

Art.-Nr.	A	B	C _{max}	D	E	Ch ₁	Ch ₂
232.01-N	1/8	M 16 x 1,5	0	14,0	4,0	19	22
232.02-N	1/4	M 20 x 1,5	0	21,0	5,0	27	24
232.03-N	3/8	M 26 x 1,5	0	21,0	5,0	30	32
232.04-N	1/2	M 28 x 1,5	0	27,0	6,5	36	32