


Einschraubschlauchtüllen

Material: Messing vernickelt
Gewinde: mit zylindrischen Außengewinden
Medien: für Luft, Wasser, Öl, Dampf etc.
Betriebstemperatur: max. 150°C
Druck: max. 60 bar

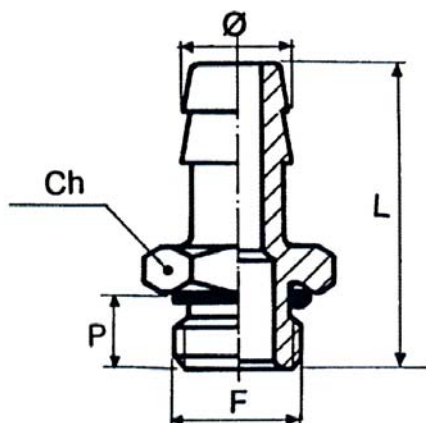

239.515

Einschraubschlauchtüllen, zylindrisch mit O-Ring

Art.-Nr.	Ø	F	Ch	P	L	O-Ring
239.501	6,0	1/8	14	6,5	30,0	7,66 x 1,78
239.502	8,0	1/8	15	6,0	31,0	7,66 x 1,78
239.503	9,0	1/8	15	6,0	31,0	7,66 x 1,78
239.505	6,0	1/4	17	8,0	32,0	10,82 x 1,78
239.507	9,0	1/4	18	8,0	33,0	10,82 x 1,78
239.509	12,0	1/4	18	8,0	33,0	10,82 x 1,78
239.510	9,0	3/8	21	9,0	34,0	14,0 x 1,78
239.512	12,0	3/8	21	9,0	34,0	14,0 x 1,78
239.515	12,0	1/2	26	11,0	36,0	17,13 x 2,62