

Schalldämpfer aus Sinterbronze, flache Ausführung, mit Innengewinde


Zur Reduzierung von Abluftgeräuschen an pneumatischen Anlagen.

Betriebsdruck:
 Betriebstemperatur:

max. 12 bar
 -10 °C bis + 150 °C



565-1



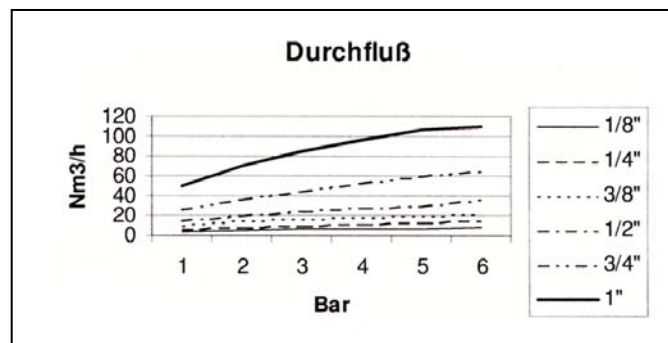
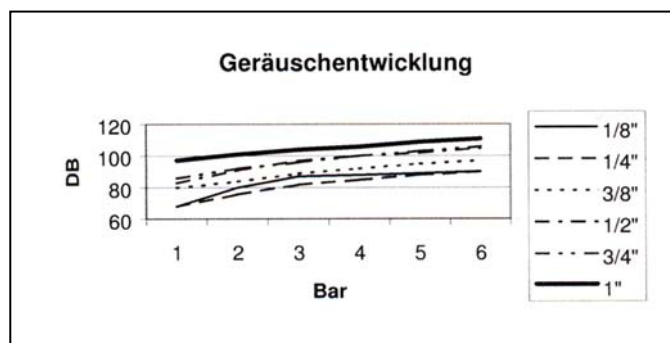
Art.-Nr.	A	ØB	C	D	SW
565-0	M 5	3,5	7,5	4,0	-
565-1	G 1/8	11,0	10,5	6,0	13
565-2	G 1/4	14,0	11,0	6,0	16
565-3	G 3/8	17,0	12,0	7,5	19
565-4	G 1/2	22,0	13,0	8,0	24

Art.-Nr.	Gewinde	1 BAR	2 BAR	3 BAR	4 BAR	5 BAR	6 BAR	mit Schalldämpfer in DB
565-0	M 5							
565-1	G 1/8	68	80	87	88	89	90	
565-2	G 1/4	68	76	82	85	88	90	
565-3	G 3/8	80	84	89	92	95	97	
565-4	G 1/2	83	91	97	100	102	105	

Art.-Nr.	Gewinde	1 BAR	2 BAR	3 BAR	4 BAR	5 BAR	6 BAR	Durchfluss in Nm/h
565-0	M 5							
565-1	G 1/8	3,4	5,0	6,0	6,5	7,3	8,0	
565-2	G 1/4	6,4	9,0	10,7	12,3	13,8	15,0	
565-3	G 3/8	10,5	14,3	16,7	18,0	20,0	22,0	
565-4	G 1/2	15,5	20,0	25,0	28,0	30,0	36,0	

Art.-Nr.	Gewinde	1 BAR	2 BAR	3 BAR	4 BAR	5 BAR	6 BAR	ohne Schalldämpfer in DB
565-0	M 5	84	92	98,0	110,0	114,0	112,0	
565-1	G 1/8	101	110	118,0	122,0	122,5	122,6	
565-2	G 1/4	109	112	124,0	124,0	124,0	124,0	
565-3	G 3/8	107	116	124,0	124,2	125,0	125,0	
565-4	G 1/2	110	118	120,0	120,0	123,0	124,0	

Art.-Nr.	Gewinde	1 BAR	2 BAR	3 BAR	4 BAR	5 BAR	6 BAR	Geräuschdämpfung Diff.
565-0	M 5							
565-1	G 1/8	33	30	31	34,0	33,5	32,6	
565-2	G 1/4	41	36	42	39,0	36,0	34,0	
565-3	G 3/8	27	32	25	32,2	30,0	28,0	
565-4	G 1/2	27	27	23	20,0	21,0	19,0	

**Abteilung ZeDok**

Tel. 07125/949741, 949742, 949753

Fax. 07125/949799

e-mail: zedok@riegler.de

Ausgabe 06/2009 Technische Änderungen vorbehalten.

Riegler & Co. KG, Druckluft-Armaturen