


Material: Messing, vernickelt
 Dichtmaterial: Buna-N
 Arbeitsdruck: max. 18 bar

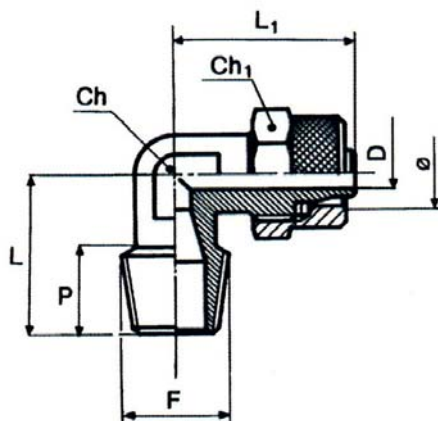

13.114-8

Winkeleinschraubverschraubung, Außengewinde konisch, Gewinde nach ISO 7-1

Art.-Nr.	Ø	F	Ch	Ch1	Gewinde Ch1	P	L	L1	D
13.118-4	4/2	R 1/8	9	10	M 7 x 0,5	8,0	16,0	24,5	1,3
13.118-5	5/3	R 1/8	8	8	M 7 x 0,75	8,0	17,0	21,5	2,0
13.118-6	6/4	R 1/8	9	12	M 10 x 1	8,0	17,0	22,0	3,0
13.118-8	8/6	R 1/8	12	14	M 12 x 1	8,0	17,0	22,0	5,0
13.118-10	10/8	R 1/8	11	16	M 14 x 1	8,0	18,5	25,5	6,8
13.114-6	6/4	R 1/4	9	12	M 10 x 1	11,0	20,0	22,0	3,0
13.114-8	8/6	R 1/4	12	14	M 12 x 1	11,0	20,0	22,0	5,0
13.114-10	10/8	R 1/4	12	16	M 14 x 1	11,0	21,0	25,0	6,8
13.138-6	6/4	R 3/8	11	12	M 10 x 1	11,5	22,5	23,5	3,0
13.138-8	8/6	R 3/8	12	14	M 12 x 1	12,0	22,0	23,0	5,0
13.138-10	10/8	R 3/8	12	16	M 14 x 1	12,0	22,0	25,0	6,8
13.138-12	12/10	R 3/8	14	18	M 16 x 1	11,5	24,5	30,0	8,5
13.112-8	8/6	R 1/2	16	12	M 12 x 1	14,0	28,0	23,5	5,0
13.112-10	10/8	R 1/2	17	16	M 14 x 1	14,0	26,0	28,5	6,8
13.112-12	12/10	R 1/2	17	19	M 16 x 1	14,0	26,0	31,0	8,5