


Material: Messing, vernickelt
Dichtmaterial: Buna-N
Arbeitsdruck: max. 18 bar

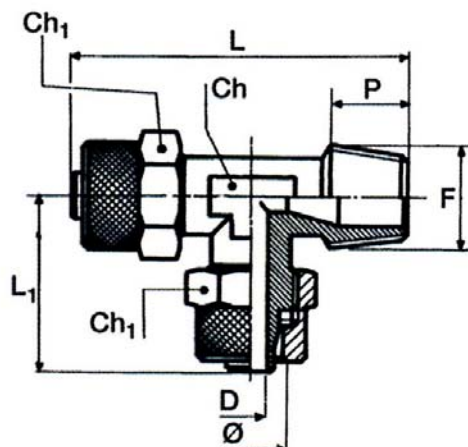

15.114-8

L-Einschraubverschraubung, Außengewinde konisch, Gewinde nach ISO 7-1

Art.-Nr.	Ø	F	Ch	Ch1	Gewinde Ch1	P	L	L1	D
15.114-6	6/4	R 1/4	9	12	M 10 x 1	11,0	42,0	22,0	3,0
15.114-8	8/6	R 1/4	12	14	M 12 x 1	11,0	42,0	22,0	5,0
15.114-10	10/8	R 1/4	12	16	M 14 x 1	11,5	46,0	25,0	6,8