


- aus Kunststoff (POM) blau -

Betriebsdruck: 0 - 10 bar
Temperaturbereich: -10 °C bis +60 °C




13.765

Winkelverschraubung, starr, Außengewinde konisch, Gewinde nach ISO 7-1

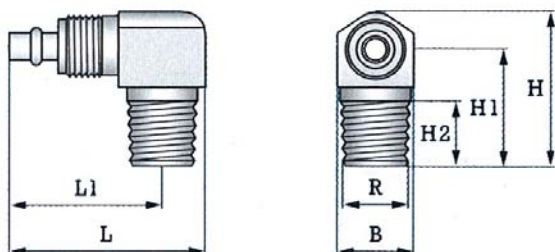

Art.-Nr.	Gewinde	für Schlauch	NW mm	B	L	L ₁	H	H ₁	H ₂
13.760	R 1/8	6/4	3,0	11	29	23	22	16	8
13.761	R 1/8	8/6	4,5	14	29	23	24	17	8
13.765	R 1/4	6/4	3,0	14	32	24	25	19	11
13.766	R 1/4	8/6	4,5	14	33	25	27	20	11
13.768	R 1/4	12/9	6,8	17	36	28	33	23	13
13.774	R 3/8	12/9	6,8	17	36	28	33	23	13

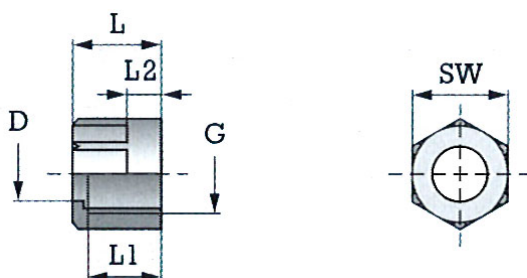

Art.-Nr.	für Schlauch	Gewinde	SW	D	L	L ₁	L ₂
13.760, 13.765	6/4	M 10 x 1	12	6,2	13	10,5	5
13.761, 13.766	8/6	M 12 x 1	14	8,2	13	10,5	5
13.768, 13.774	12/9	M 16 x 1	19	12,4	14	11,5	6