


- Edelstahl 1.4408 -

Arbeitsdruck:
Innengewinde:
Außengewinde:

max. 20 bar
zylindrisch nach DIN EN ISO 228-1
zylindrisch nach DIN EN ISO 228-1

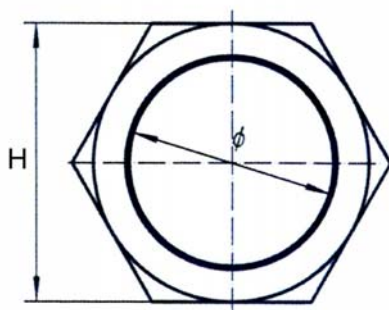

265.06-ES

Überwurfmutter, 6-kant

Art.-Nr.	Gewinde G	A	H	Ø
265.01-ES	1/8	6,0	14,0	8,4
265.02-ES	1/4	7,0	21,8	11,3
265.03-ES	3/8	8,0	26,8	15,0
265.04-ES	1/2	9,3	31,8	18,3
265.05-ES	3/4	9,5	35,8	23,8
265.06-ES	1	10,0	45,8	28,8
265.07-ES	1 1/4	11,0	55,0	37,0
265.08-ES	1 1/2	12,0	60,0	44,5
265.09-ES	2	13,0	74,5	55,0