



T-Verteiler
- Edelstahl 1.4401 / 1.4408 -

Betriebsdruck: max. 20 bar
 Betriebstemperatur: max. 175 °C
 Innengewinde: Rp-Gewinde nach ISO 7-1

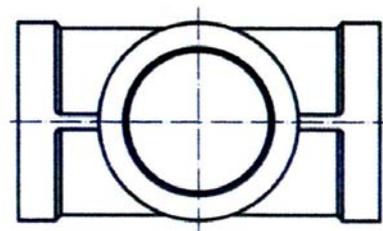

254.36-ES

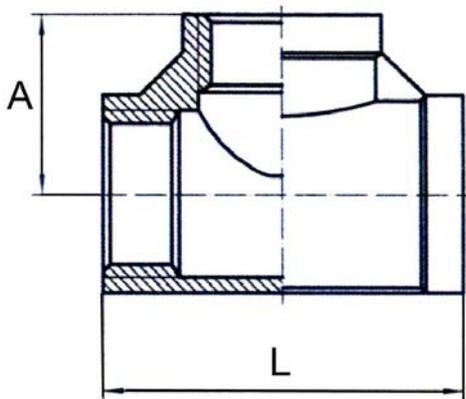

T-Verteiler, 3 x innen, Rp-Gewinde nach ISO 7-1

Art.-Nr.	Gewinde	L	A
254.33-ES	1/8	34,0	16,7
254.34-ES	1/4	37,7	19,0
254.35-ES	3/8	48,2	21,8
354.36-ES	1/2	54,0	26,8
254.37-ES	3/4	62,2	31,2
254.38-ES	1	72,5	36,0