

Einschraubschlauchtüllen

Material:

Gewinde:

Medien:

Betriebstemperatur:

Druck:


Messing vernickelt

mit zylindrischen Außengewinden

für Luft, Wasser, Öl, Dampf etc.

max. 150 °C

max. 60 bar

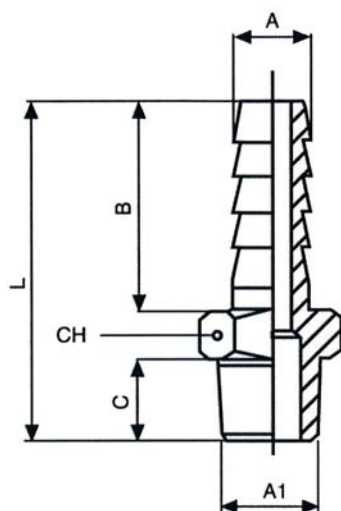

239.107

Einschraubschlauchtüllen, Außengewinde konisch nach ISO 7-1

Art.-Nr.	A	A1	B	C	L	Ch
239.101	6	R 1/8	19	8,0	31,5	12
239.102	8	R 1/8	19	8,0	31,5	12
239.103	9	R 1/8	19	8,0	31,5	12
239.104	10	R 1/8	20	8,0	32,5	12
239.105	6	R 1/4	19	11,0	35,0	14
239.106	8	R 1/4	19	11,0	35,0	14
239.107	9	R 1/4	19	11,0	35,0	14
239.108	10	R 1/4	20	11,0	36,0	14
239.109	12	R 1/4	20	11,0	36,0	14
239.110	9	R 3/8	19	11,5	35,5	17
239.111	10	R 3/8	20	11,5	36,5	17
239.112	12	R 3/8	20	11,5	36,5	17
239.113	9	R 1/2	19	14,0	38,5	22
239.114	10	R 1/2	20	14,0	39,5	22
239.115	12	R 1/2	20	14,0	39,5	22