



Material: Messing, vernickelt
Dichtmaterial: Buna-N
Arbeitsdruck: max. 18 bar

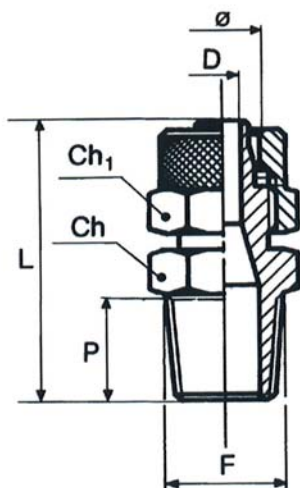

11.614-8

Gerade Einschraubverschraubung, Außengewinde konisch, Gewinde nach ISO 7-1

Art.-Nr.	Ø	F	Ch	Ch1	Gewinde Ch1	P	L	D
11.618-4	4/2	R 1/8	10	10	M 7 x 0,5	8,0	41,0	1,3
11.618-5	5/3	R 1/8	12	8	M 7 x 0,75	8,0	25,0	2,0
11.618-6	6/4	R 1/8	12	12	M 10 x 1	8,0	26,5	3,0
11.618-8	8/6	R 1/8	12	14	M 12 x 1	8,0	26,5	5,0
11.618-10	10/8	R 1/8	14	16	M 14 x 1	8,0	29,5	6,0
11.614-6	6/4	R 1/4	14	12	M 10 x 1	11,0	30,0	3,0
11.614-8	8/6	R 1/4	14	14	M 12 x 1	11,0	30,0	5,0
11.614-10	10/8	R 1/4	14	16	M 14 x 1	11,0	32,0	6,8
11.638-6	6/4	R 3/8	17	12	M 10 x 1	11,5	31,5	3,0
11.638-8	8/6	R 3/8	17	14	M 12 x 1	11,5	31,0	5,0
11.638-10	10/8	R 3/8	17	16	M 14 x 1	11,5	33,0	6,8
11.638-12	12/10	R 3/8	17	19	M 16 x 1	11,5	35,0	8,5
11.612-8	8/6	R 1/2	22	14	M 12 x 1	14,0	34,5	5,0
11.612-10	10/8	R 1/2	22	16	M 14 x 1	14,0	36,0	6,8
11.612-12	12/10	R 1/2	22	18	M 16 x 1	14,0	37,5	8,5