


Ausführung mit zylindrischem Gewinde und Weichdichtung aus NBR


Temperaturbereich: -35 °C bis +100 °C

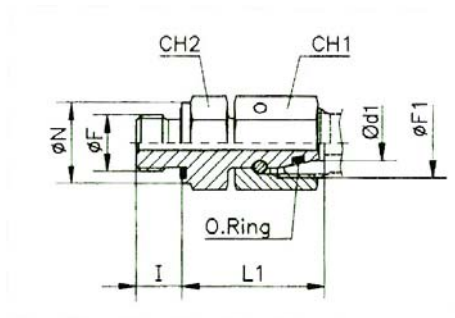

V 503

Einstellbare gerade Einschraubverschraubung mit Dichtkegel, 360° drehbar


Artikel-Nr.	Rohr-Außen-Ø	PN	L1	Ø F	I	CH2	Ø N	Ø F1	CH1	O-Ring (Shore A ca. 90)
V 501	6	315	24,5	1/8	8	14	14	12 x 1,5	14	4,0 x 1,5
V 502	8	315	29,5	1/4	12	19	19	14 x 1,5	17	6,0 x 1,5
V 503	10	315	27,5	1/4	12	19	19	16 x 1,5	19	7,5 x 1,5
V 504	12	315	34,0	3/8	12	22	22	18 x 1,5	22	9,0 x 1,5
V 505	15	315	32,0	1/2	14	27	27	22 x 1,5	27	12,0 x 2,0
V 506	18	315	31,5	1/2	14	27	27	26 x 1,5	32	15,0 x 2,0
V 507	22	160	32,5	3/4	16	32	32	30 x 2,0	36	20,0 x 2,0

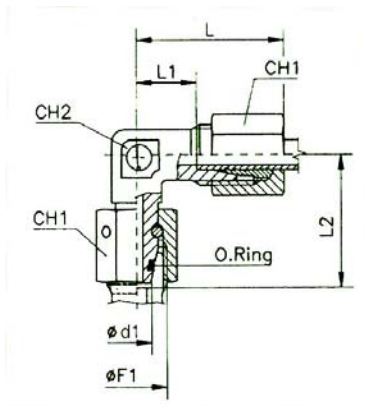

V 513

Einstellbare Winkelverschraubung mit Dichtkegel, 360° drehbar


Artikel-Nr.	Rohr- Außen- Ø	PN	L	L1	L2	Ø F1	CH1	CH2	O-Ring (Shore A ca. 90)
V 511	6	315	27	12,0	26,0	12 x 1,5	14	12	4,0 x 1,5
V 512	8	315	29	14,0	27,5	14 x 1,5	17	12	6,0 x 1,5
V 513	10	315	30	15,0	29,0	16 x 1,5	19	14	7,5 x 1,5
V 514	12	315	32	17,0	29,5	18 x 1,5	22	17	9,0 x 1,5
V 515	15	315	36	21,0	32,5	22 x 1,5	27	19	12,0 x 2,0
V 516	18	315	40	23,5	35,5	26 x 1,5	32	24	15,0 x 2,0
V 517	22	160	44	27,5	38,5	30 x 2,0	36	27	20,0 x 2,0

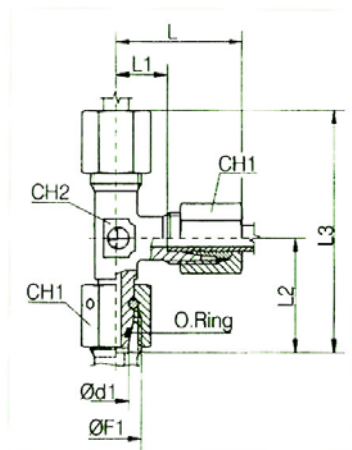

V 523

Einstellbare L-Verschraubung mit Dichtkegel, 360° drehbar


Artikel-Nr.	Rohr- Außen- Ø	PN	L	L1	L2	L3	Ø F1	CH1	CH2	O-Ring (Shore A ca. 90)
V 521	6	315	27	12,0	26,0	53	12 x 1,5	14	12	4,0 x 1,5
V 522	8	315	29	14,0	27,5	56	14 x 1,5	17	12	6,0 x 1,5
V 523	10	315	30	15,0	29,0	59	16 x 1,5	19	14	7,5 x 1,5
V 524	12	315	32	17,0	29,5	61	18 x 1,5	22	17	9,0 x 1,5
V 525	15	315	36	21,0	32,5	69	22 x 1,5	27	19	12,0 x 2,0
V 526	18	315	40	23,5	35,5	75	26 x 1,5	32	24	15,0 x 2,0
V 527	22	160	44	27,5	38,5	82	30 x 2,0	36	27	20,0 x 2,0

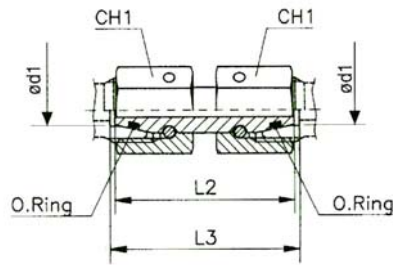

V 533

Einstellbare gerade Verschraubung mit Dichtkegel, 360° drehbar


Artikel-Nr.	Rohr-Außen-Ø	PN	L2	L3	CH1	O-Ring (Shore A ca. 90)
V 531	6	315	34,0	35,0	14	4,0 x 1,5
V 532	8	315	34,0	35,0	17	6,0 x 1,5
V 533	10	315	36,0	37,0	19	7,5 x 1,5
V 534	12	315	36,0	37,0	22	9,0 x 1,5
V 535	15	315	39,0	40,0	27	12,0 x 2,0
V 536	18	315	40,5	41,5	32	15,0 x 2,0
V 537	22	160	45,0	46,0	36	20,0 x 2,0

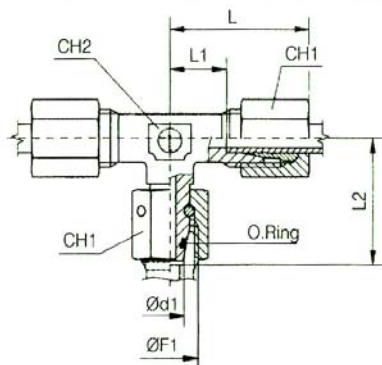

V 543

Einstellbare T-Verschraubung mit Dichtkegel, 360° drehbar


Artikel-Nr.	Rohr-Außen-Ø	PN	L	L1	L2	Ø F1	CH1	CH2	O-Ring (Shore A ca. 90)
V 541	6	315	27	12,0	26,0	12 x 1,5	14	12	4,0 x 1,5
V 542	8	315	29	14,0	27,5	14 x 1,5	17	12	6,0 x 1,5
V 543	10	315	30	15,0	29,0	16 x 1,5	19	14	7,5 x 1,5
V 544	12	315	32	17,0	29,5	18 x 1,5	22	17	9,0 x 1,5
V 545	15	315	36	21,0	32,5	22 x 1,5	27	19	12,0 x 2,0
V 546	18	315	40	23,5	35,5	26 x 1,5	32	24	15,0 x 2,0
V 547	22	160	44	27,5	38,5	30 x 2,0	36	27	20,0 x 2,0

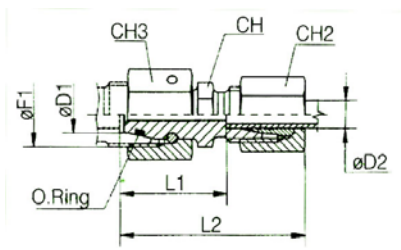

V 557

Reduzierschraubung mit Dichtkegel

Artikel-Nr.	Rohr- Außen- Ø 1	Rohr- Außen- Ø 2	PN	L1	L2	CH2	CH3	Ø F1	CH	O-Ring (Shore A ca. 90)
V 551	8	6	315	23,5	38	14	17	14 x 1,5	12	6,0 x 1,5
V 552	10	6	315	25,0	40	14	19	16 x 1,5	14	7,5 x 1,5
V 553	12	6	315	25,0	40	14	22	18 x 1,5	17	9,0 x 1,5
V 554	15	6	315	28,5	43	14	27	22 x 1,5	19	12,0 x 2,0
V 555	18	6	315	28,0	43	14	32	26 x 1,5	24	15,0 x 2,0
V 556	22	6	160	32,0	47	14	36	30 x 2,0	27	20,0 x 2,0
V 557	10	8	315	25,0	40	17	19	16 x 1,5	14	7,5 x 1,5
V 558	12	8	315	25,0	40	17	22	18 x 1,5	17	9,0 x 1,5
V 559	15	8	315	28,5	43	17	27	22 x 1,5	19	12,0 x 2,0
V 560	18	8	315	28,0	43	17	32	26 x 1,5	24	15,0 x 2,0
V 561	22	8	160	32,0	47	17	36	30 x 2,0	27	20,0 x 2,0
V 562	12	10	315	26,0	41	19	22	18 x 1,5	17	9,0 x 1,5
V 563	15	10	315	29,5	44	19	27	22 x 1,5	19	12,0 x 2,0
V 564	18	10	315	29,0	44	19	32	26 x 1,5	24	15,0 x 2,0
V 565	22	10	160	33,0	48	19	36	30 x 2,0	27	20,0 x 2,0
V 566	15	12	315	29,5	44	22	27	22 x 1,5	19	12,0 x 2,0
V 567	18	12	315	29,0	44	22	32	26 x 1,5	24	15,0 x 2,0
V 568	22	12	160	33,0	48	22	36	30 x 2,0	27	20,0 x 2,0
V 569	18	15	315	30,0	45	27	32	26 x 1,5	24	15,0 x 2,0
V 570	22	15	160	34,0	49	27	36	30 x 2,0	27	20,0 x 2,0
V 571	22	18	160	33,5	50	32	36	30 x 2,0	27	20,0 x 2,0

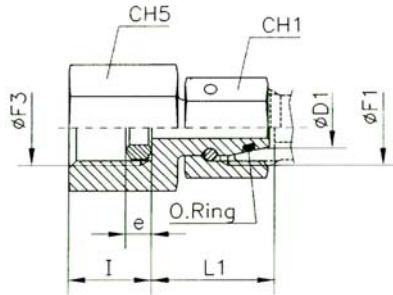

V 583

Manometer-Anschlussverschraubung mit Dichtkegel, Innengewinde zylindrisch

Artikel-Nr.	Rohr- Außen- Ø	PN	Ø F3	Ø F1	L1	CH1	CH5	e Dichtring mit Einschnittkante	I	O-Ring (Shore A ca. 90)
V 581	6	315	1/4	12 x 1,5	21,0	14	19	4,5	14,5	4,0 x 1,5
V 582	8	315	1/4	14 x 1,5	21,5	17	19	4,5	14,5	6,0 x 1,5
V 583	10	315	1/4	16 x 1,5	22,0	19	19	4,5	14,5	7,5 x 1,5
V 584	12	315	1/4	18 x 1,5	22,0	22	19	4,5	14,5	9,5 x 1,5

Baumaße sind Circa-Maße bei angezogener Überwurfmutter.