



Ausführung mit zylindrischem Gewinde und Weichdichtung aus NBR.

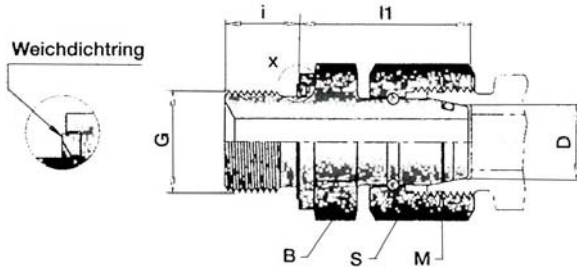

ES 504

Einstellbare gerade Einschraubverschraubung mit Dichtkegel


Artikel-Nr.	PN	D	M	G	i	S	B	l ₁	O-Ring
ES 501	315	6	M 12 x 1,5	G 1/8 A	8	14	14	24,5	5,0 x 1,0
ES 502	315	8	M 14 x 1,5	G 1/4 A	12	17	17	29,5	6,0 x 1,5
ES 503	315	10	M 16 x 1,5	G 1/4 A	12	19	19	27,5	7,5 x 1,5
ES 504	315	12	M 18 x 1,5	G 3/8 A	12	22	22	34,0	9,0 x 1,5
ES 505	315	15	M 22 x 1,5	G 1/2 A	14	27	27	32,0	12,0 x 2,0
ES 506	315	18	M 26 x 1,5	G 1/2 A	14	32	27	31,5	15,0 x 2,0
ES 507	160	22	M 30 x 2,0	G 3/4 A	16	36	32	32,5	20,0 x 2,0

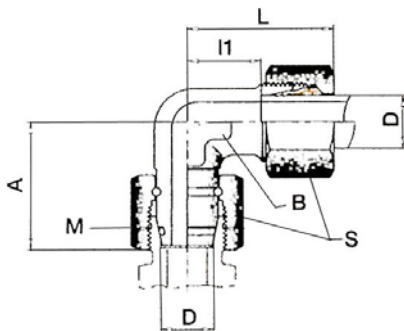

ES 514

Einstellbare Winkelverschraubung mit Dichtkegel


Artikel-Nr.	PN	D	M	S	B	A	L	l ₁	O-Ring
ES 511	315	6	M 12 x 1,5	14	12	26,0	27	12,0	5,0 x 1,0
ES 512	315	8	M 14 x 1,5	17	12	27,5	29	14,0	6,0 x 1,5
ES 513	315	10	M 16 x 1,5	19	14	29,0	30	15,0	7,5 x 1,5
ES 514	315	12	M 18 x 1,5	22	17	29,5	32	17,0	9,0 x 1,5
ES 515	315	15	M 22 x 1,5	27	19	32,5	36	21,0	12,0 x 2,0
ES 516	315	18	M 26 x 1,5	32	24	35,5	40	23,5	15,0 x 2,0
ES 517	160	22	M 30 x 2,0	36	27	38,5	44	27,5	20,0 x 2,0

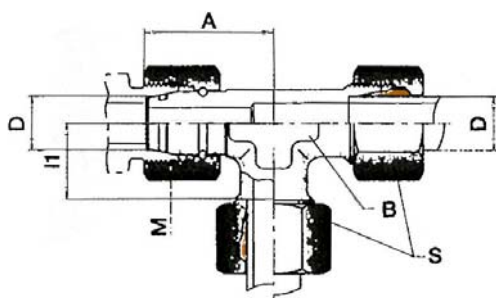

ES 524

Einstellbare L-Verschraubung mit Dichtkegel


Artikel-Nr.	PN	D	M	S	B	A	I ₁	O-Ring
ES 521	315	6	M 12 x 1,5	14	12	26,0	12,0	5,0 x 1,0
ES 522	315	8	M 14 x 1,5	17	12	27,5	14,0	6,0 x 1,5
ES 523	315	10	M 16 x 1,5	19	14	29,0	15,0	7,5 x 1,5
ES 524	315	12	M 18 x 1,5	22	17	29,5	17,0	9,0 x 1,5
ES 525	315	15	M 22 x 1,5	27	19	32,5	21,0	12,0 x 2,0
ES 526	315	18	M 26 x 1,5	32	24	35,5	23,5	15,0 x 2,0
ES 527	160	22	M 30 x 2,0	36	27	38,5	27,5	20,0 x 2,0

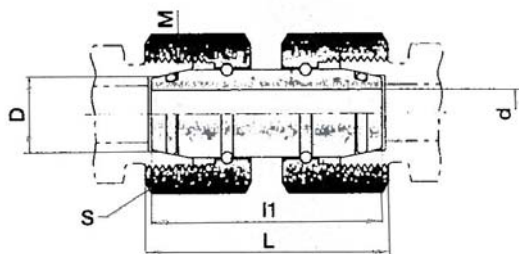

ES 534

Einstellbare gerade Verschraubung mit Dichtkegel


Artikel-Nr.	PN	D	M	S	d	L	I ₁	O-Ring
ES 531	315	6	M 12 x 1,5	14	2,5	38,0	36,0	5,0 x 1,0
ES 532	315	8	M 14 x 1,5	17	4,0	39,0	36,0	6,0 x 1,5
ES 533	315	10	M 16 x 1,5	19	6,0	40,0	38,0	7,5 x 1,5
ES 534	315	12	M 18 x 1,5	22	7,5	40,0	38,0	9,0 x 1,5
ES 535	315	15	M 22 x 1,5	27	9,5	43,0	41,0	12,0 x 2,0
ES 536	315	18	M 26 x 1,5	32	12,5	44,5	42,5	15,0 x 2,0
ES 537	160	22	M 30 x 2,0	36	16,0	49,0	47,0	20,0 x 2,0

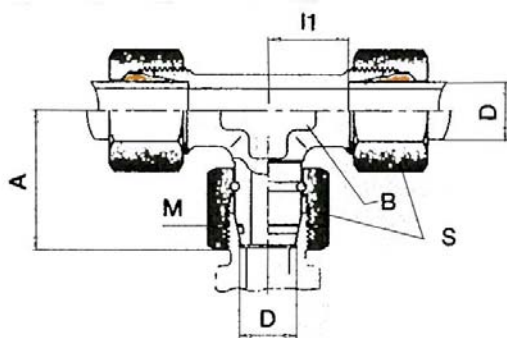

ES 544

Einstellbare T-Verschraubung mit Dichtkegel


Artikel-Nr.	PN	D	M	S	B	A	I ₁	O-Ring
ES 541	315	6	M 12 x 1,5	14	12	26,0	12,0	5,0 x 1,0
ES 542	315	8	M 14 x 1,5	17	12	27,5	14,0	6,0 x 1,5
ES 543	315	10	M 16 x 1,5	19	14	29,0	15,0	7,5 x 1,5
ES 544	315	12	M 18 x 1,5	22	17	29,5	17,0	9,0 x 1,5
ES 545	315	15	M 22 x 1,5	27	19	32,5	21,0	12,0 x 2,0
ES 546	315	18	M 26 x 1,5	32	24	35,5	23,5	15,0 x 2,0
ES 547	160	22	M 30 x 2,0	36	27	38,5	27,5	20,0 x 2,0

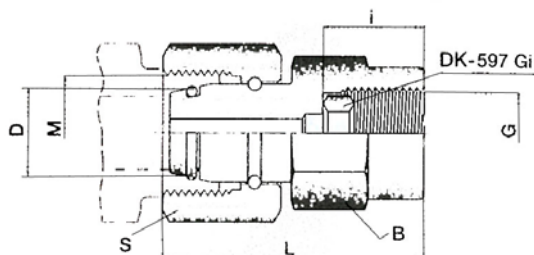

ES 584

Manometer-Anschlussverschraubung mit Dichtkegel, Innengewinde

Artikel-Nr.	PN	D	G	i	M	S	B	L	O-Ring
ES 581	315	6	G 1/4	14,5	M 12 x 1,5	14	19	35,5	5,0 x 1,0
ES 582	315	8	G 1/4	14,5	M 14 x 1,5	17	19	37,5	6,0 x 1,5
ES 583	315	10	G 1/4	14,5	M 16 x 1,5	19	19	36,0	7,5 x 1,5
ES 584	315	12	G 1/4	14,5	M 18 x 1,5	22	19	36,0	9,0 x 1,5

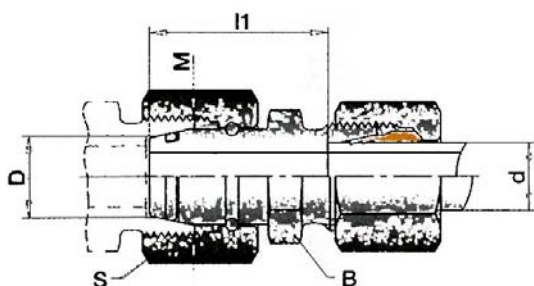

ES 562

Reduzierschraubung mit Dichtkegel

Artikel-Nr.	PN	D	d	M	S	B	l ₁	O-Ring
ES 551	315	8	6	M 14 x 1,5	17	12	25,5	6,0 x 1,5
ES 552	315	10	6	M 16 x 1,5	19	14	26,0	7,5 x 1,5
ES 553	315	12	6	M 18 x 1,5	22	17	25,0	9,0 x 1,5
ES 554	315	15	6	M 22 x 1,5	27	22	28,5	12,0 x 2,0
ES 555	315	18	6	M 26 x 1,5	32	24	28,0	15,0 x 2,0
ES 556	160	22	6	M 30 x 2,0	36	27	32,0	20,0 x 2,0
ES 557	315	10	8	M 16 x 1,5	19	14	26,0	7,5 x 1,5
ES 558	315	12	8	M 18 x 1,5	22	17	26,0	9,0 x 1,5
ES 559	315	15	8	M 22 x 1,5	27	22	28,5	12,0 x 2,0
ES 560	315	18	8	M 26 x 1,5	32	24	28,0	15,0 x 2,0
ES 561	160	22	8	M 30 x 2,0	36	27	32,0	20,0 x 2,0
ES 562	315	12	10	M 18 x 1,5	22	17	27,5	9,0 x 1,5
ES 563	315	15	10	M 22 x 1,5	27	22	29,5	12,0 x 2,0
ES 564	315	18	10	M 26 x 1,5	32	24	29,0	15,0 x 2,0
ES 565	160	22	10	M 30 x 2,0	36	27	33,0	20,0 x 2,0
ES 566	315	15	12	M 22 x 1,5	27	22	29,5	12,0 x 2,0
ES 567	315	18	12	M 26 x 1,5	32	24	30,0	15,0 x 2,0
ES 568	160	22	12	M 30 x 2,0	36	27	33,0	20,0 x 2,0
ES 569	315	18	15	M 26 x 1,5	32	24	30,0	15,0 x 2,0
ES 570	160	22	15	M 30 x 2,0	36	27	34,0	20,0 x 2,0
ES 571	160	22	18	M 30 x 2,0	36	27	33,5	20,0 x 2,0