



- aus Kunststoff (POM) blau -

Betriebsdruck: 0 - 10 bar
Temperaturbereich: -10 °C bis +60 °C




14.912

T-Verbinder, starr

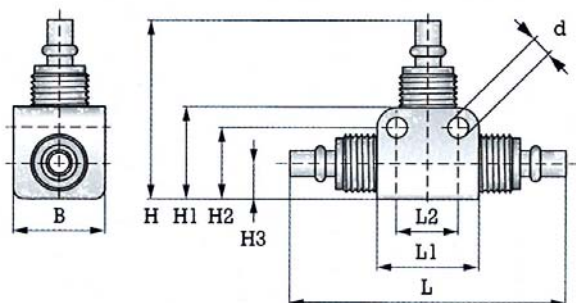

Artikel-Nr.	für Schlauch	NW mm	L	L ₁	L ₂	B	d	H	H ₁	H ₂	H ₃
14.911	6/4	3,0	52	20	12,0	15	4,3	32	16	12,0	6
14.912	8/6	4,5	52	20	12,0	18	4,3	34	18	14,0	8
14.913	12/9	6,8	63	25	15,5	22	4,3	40	21	16,5	8

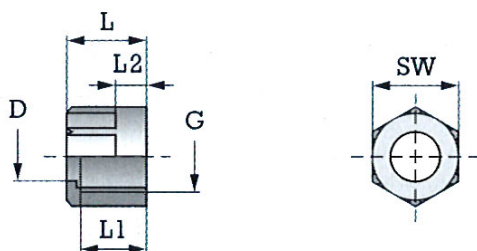

Artikel-Nr.	für Schlauch	Gewinde	SW	D	L	L ₁	L ₂
14.911	6/4	M 10 x 1	12	6,2	13	10,5	5
14.912	8/6	M 12 x 1	14	8,2	13	10,5	5
14.913	12/9	M 16 x 1	19	12,4	14	11,5	6